

Absolute encoders – multiturn

Standard
ATEX/IECEX – mining, mechanical multiturn, optical


Sendix 7168 (shaft)

CANopen



The Sendix 7168 absolute multiturn encoders in a compact 70 mm stainless-steel housing, with a CANopen interface and optical sensor technology have an ATEX/IECEX mining approval.

These shock and vibration-resistant encoders operate flexibly with a resolution of up to 28 bits; they are also available with axial and radial cable outlets.

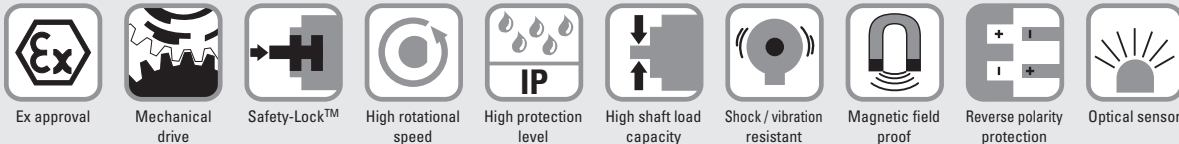

Compact and safe

- Can be used even when space is tight.
- Minimal installation depth, diameter 70 mm.
- Compact cable outlet axial or radial.
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection).

Explosion protection

- Mining approval.
- “Flame-proof enclosure” construction.
- ATEX with EC type examination certificate.
- IECEX with certificate of conformity (CoC).

Order code 8.7168 . 2 X 2 X . 21 21 . XXXX
Shaft version Type

a Flange
2 = clamping-synchronous flange, IP67, \varnothing 70 mm [2.76"]

b Shaft ($\varnothing \times L$)
2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway for 4 x 4 mm [0.16 x 0.16"] key

c Interface / power supply
2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection
1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']
preferred length see **f**, e. g.: 0100 = 10 m [32.81']

e Fieldbus profile
21 = CANopen encoder profile DS406 V3.2

f Cable length in dm ¹⁾
0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request
- special cable length

1) Not applicable with connection types 1 and 2.

Absolute encoders – multiturn

Standard ATEX/IECEx – mining, mechanical multiturn, optical	Sendix 7168 (shaft)	CANopen
--	----------------------------	----------------

Technical data

Explosion protection ATEX	
EC type-examination certificate	IBExU 14 ATEX 1047 X
Category	⊕ I M2 Ex d I/IIC T4 - T6 Mb
Directive 94/9/EC	EN 60079-0: 2012; EN 60079-1: 2007

Explosion protection IECEx	
Certificate of conformity (CoC)	IECEx IBE 14.0023 X
Category	I M2 Ex d I/IIC T4 - T6 Mb
IECEx	IEC 60079-0:2011; IEC 60079-1:2007

Mechanical characteristics		
Max. speed	continuous 6 000 min ⁻¹	
Starting torque – at 20°C [68°F]	< 0.05 Nm	
Mass moment of inertia	4.0 x 10 ⁻⁶ kgm ²	
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	approx. 1.3 kg [45.86 oz]	
Protection acc. to EN 60529	IP67	
Working temperature range	-40°C ... +60°C [-40 ... +140°F]	
Material	shaft	stainless steel
	flange / housing	stainless steel
	cable	PUR
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz	

Electrical characteristics	
Power supply	10 ... 30 V DC
Current consumption (no load)	max. 100 mA
Reverse polarity protection for power supply (+V)	yes
CE compliant acc. to	EMC guideline 2004/108/EC ATEX guideline 94/9/EC RoHS guideline 2011/65/EU

Interface characteristics CANopen	
Resolution Singleturn	1 ... 65535 (16 bit), scalable
Number of revolutions (multiturn)	max. 4096 (12 bit) scalable only via the total resolution
Total resolution	1 ... 268.435.456 (28 bit), scalable default: 33.554.432 (25 bit)
Code	binary
Interface	CAN high-speed acc. to ISO 11898, Basic- and Full-CAN, CAN specification 2.0 B
Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons
Baud rate	10 ... 1000 kbit/s (software configurable)
Node address	1 ... 127 (software configurable)
Switchable termination	software configurable

 Absolute encoders
multiturn

General information about CANopen

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02.

In addition, device-specific profiles like the encoder profile DS406 V3.2 are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode and a High Resolution Sync Protocol. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CANbus. When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

As output values **position, speed, acceleration** as well as the **working area status** may be combined freely as PDO (PDO mapping)

CANopen communication profile DS301 V4.02

Among others, the following functionality is integrated:

Class C2 functionality

- NMT slave.
- Heartbeat protocol.
- High resolution sync protocol.
- Identity object.
- Error behaviour object.
- Variable PDO mapping self-start programmable (power on to operational), 3 Sending PDO's.
- Node address, baud rate and CANbus programmable termination.

CANopen encoder profile DS406 V3.2

The following parameters can be programmed:

- Event mode.
- Units for speed selectable (Steps/Sec or min⁻¹).
- Factor for speed calculation (e.g. measuring wheel circumference)
Integration time for speed value of 1...32.
- 2 work areas with 2 upper and lower limits and the corresponding output states.
- Variable PDO mapping of position, speed, acceleration, working area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status - 3 LED's.
- Optional - 32 CAMs programmable.
- Customer-specific memory - 16 Bytes.

Universal scaling function

At the end of the physical resolution of an encoder, **when scaling is active**, an error appears if the division of the physical limit (GP_U) by the programmed total resolution (TMR) does not produce an integer.

The universal scaling function remedies this problem.

Absolute encoders – multiturn

Standard
ATEX/IECEx – mining, mechanical multiturn, optical

Sendix 7168 (shaft)

CANopen

Terminal assignment


Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)								
		Signal:	0 V	+V	CAN_H	CAN_L	CAN_GND	CAN_H	CAN_L	CAN_GND
2	1, 2, A, B	Cable marking:	1	2	4	5	6	7	8	9

Dimensions

Dimensions in mm [inch]

Clamping-synchronous flange, \varnothing 70 [2.76] Shaft type 1 with axial cable outlet

- 1 6 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

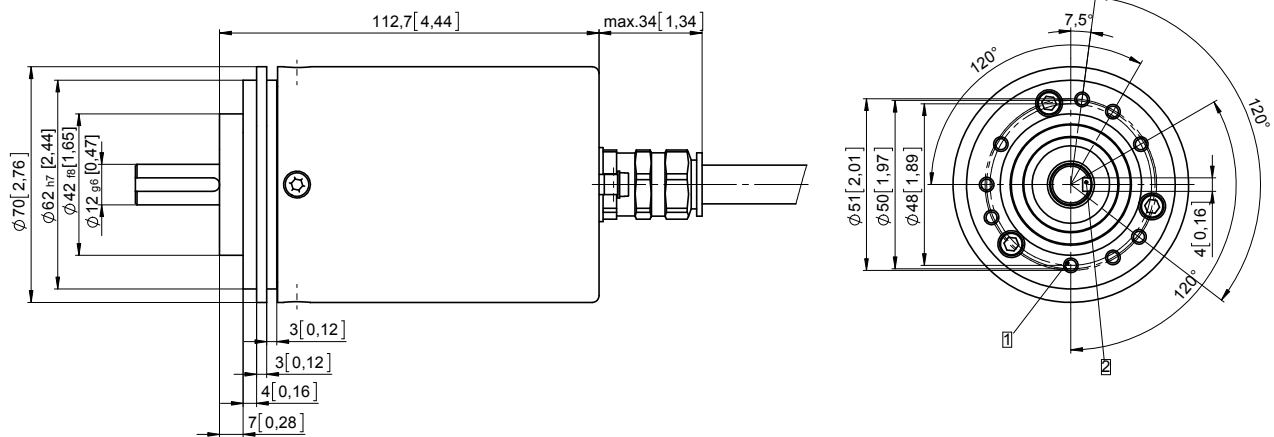

Clamping-synchronous flange, \varnothing 70 [2.76] Shaft type 2 with radial cable outlet

- 1 6 x M4, 10 [0.39] deep

