

COMBIVERT



R6

Regenerative systems

KEB

GB


KEB COMBIVERT R6

All moving systems have kinetic energy when in operation. Historically, that kinetic energy was eliminated through friction or a mechanical braking device.


In recent years, with the advent of AC motor controls and servo systems, a new method of dissipating kinetic energy evolved. To slow a moving system down, the motor operates as a generator, and converts the mechanical energy back into electrical energy. This electrical energy is then shunted into what is typically referred to as a braking resistor.

Thus the system's kinetic energy is turned into heat. In many applications, this is sufficient. However some applications, due to the large moving mass and/or high efficiency, produce almost as much return energy as they take in from the utility.

In these applications the braking resistors can become quite large, produce tremendous amounts of heat, and make operation of the system expensive. As a result KEB saw the need to develop a better solution.

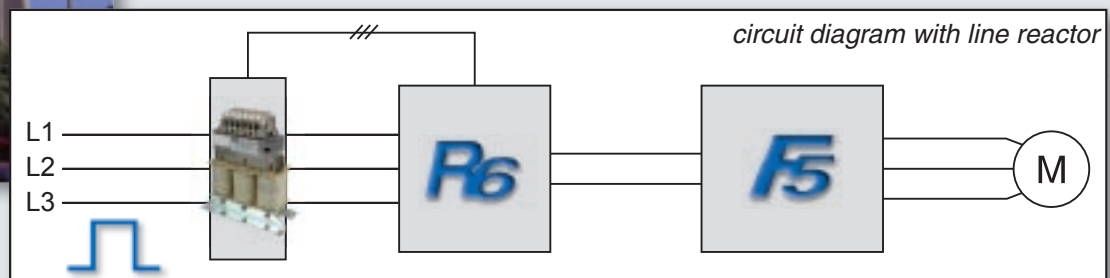

In combination with the KEB COMBILINE harmonic filters the KEB COMBIVERT R6-units enable sinusoidal feed-back.

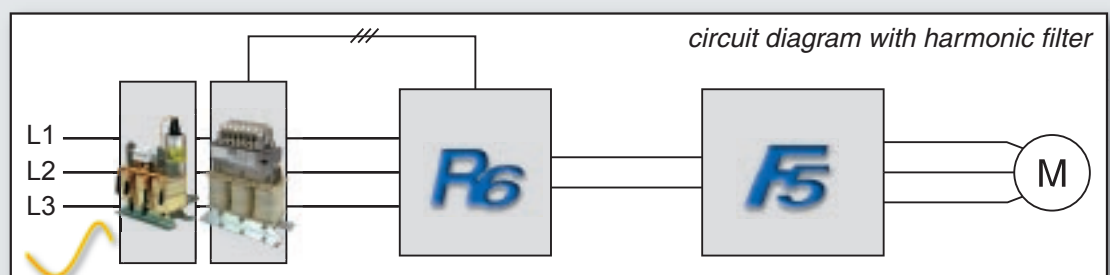

**Energy saving by using the feed-back –
an environmental contribution that pays off!**

The new technical solution for

Passenger lifts and freight elevators

- replacement of traditional braking resistors
- amortization through energy saving possible after less than 2 years of operating time
- **reduced** fire hazard of the system



Lifting- and conveying systems / storage techniques

- connection of drives possible in DC-interconnected operation, with energy compensation and feed-back of the load peaks into the mains power supply
- no heat source mounted on the traversing unit



Theatre technology

- no heating through resistors
- energy optimization of the system
- low-noise braking operation

Test systems

- continuous energy feed-back
- cascadable for high ratings




Decentral power supply solutions

- international standards (e.g.: IEEE-519 / THD I < 8%) can be met with harmonic filters



KEB COMBIVERT R6

The **block-shaped feed-back produced** is usable with single units or in modular configuration.

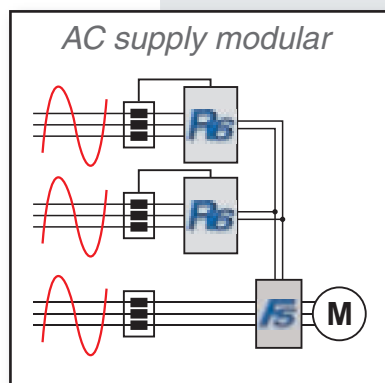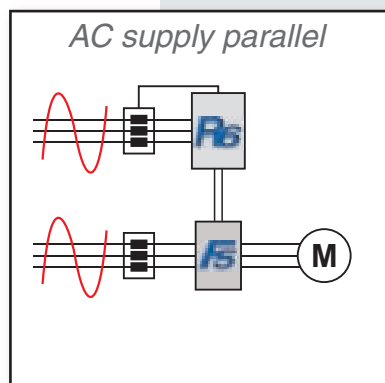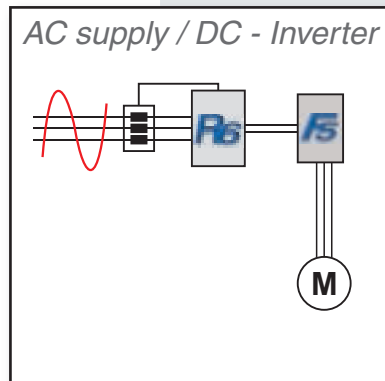

System characteristics KEB COMBIVERT R6

- high capacity for DC connection of inverters and servo controllers
- complete system available from KEB:
unit / commutation choke / EMC filter, class A
- high overall efficiency gives optimum use of the kinetic energy
- indication of feed-in rating, feed-back rating and overall balance gives a general view of the economic efficiency of the system
- compact, modular design permits optimal system integration or retrofitting of existing plants
- universal suitability for all popular supply voltages from 200 V ... 500 V AC, 50/60 Hz
- integrated DC fuse reduces external wiring / installation costs
- digital control and serial connection available

CANopen

KEB-HSP 5 /
DIN 66019-II

DeviceNet

MODBUS

EtherCAT

SERCOS
interface

PROFI
BUS


INTERBUS

ETHERNET
POWERLINK

PROFI
NET

Ethernet
TCP/IP

Voltage- / current diagram in regen operation

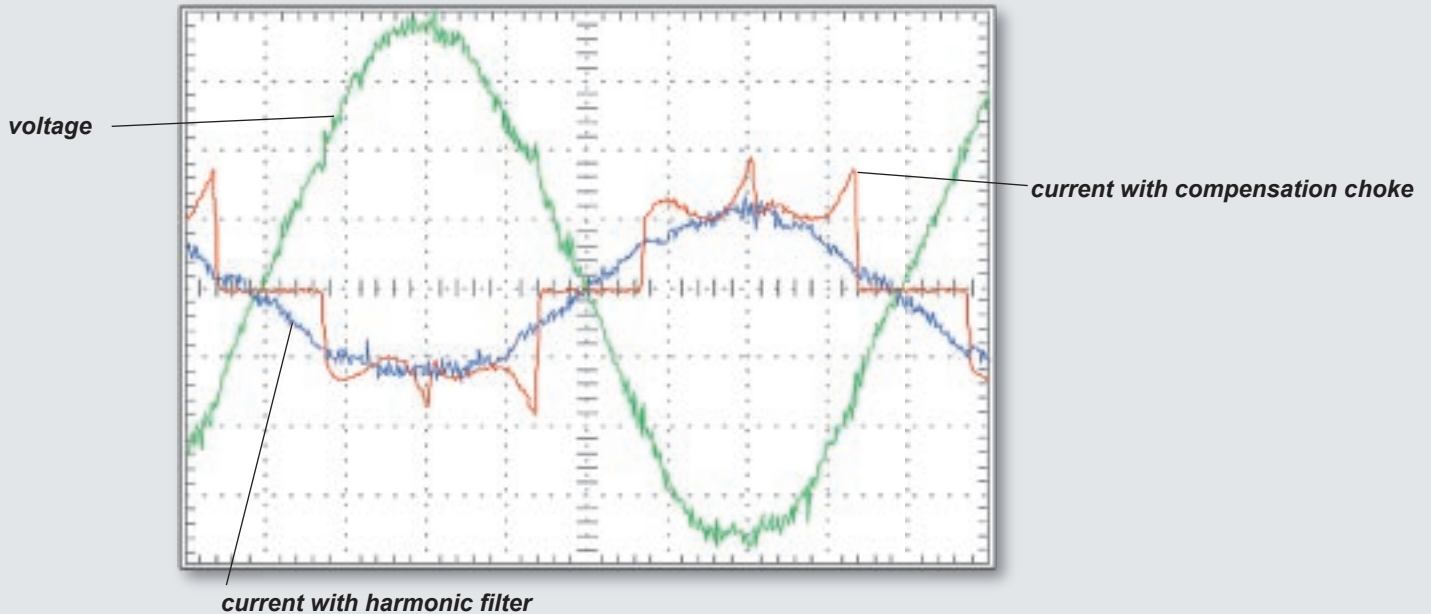

For the integration into the system controller, the KEB COMBIVERT R6 has both serial communication and free programmable analog/digital in- and outputs.

4 x digital in
2 x digital out
2 x relay out
1 x analog out



Easy handling is ensured through the factory-provided short menu (CP-Parameter).





More individual adjustments are possible in the application level.

The universal PC tool KEB COMBIVIS offers a user friendly programming and monitoring platform for an easy start-up, diagnosis or maintenance.

The download is free-of-charge under www.keb.de.

KEB COMBIVERT R6

Technical data

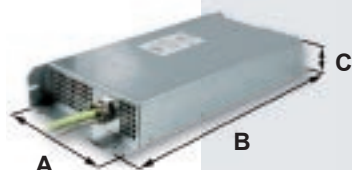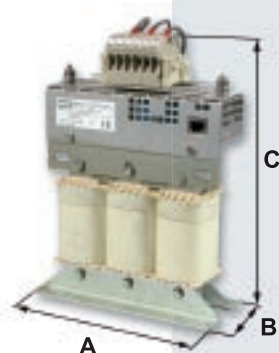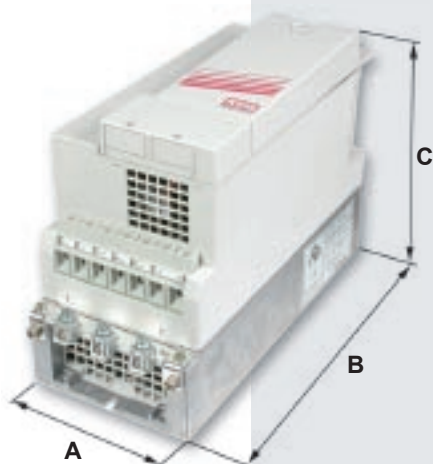

Supply- and regenerative units			
Part-No.		15.R6.S3E-900A	19.R6.S3E-900A
Phases		3	
Rated voltage *	[V]	400 (230)	
Mains voltage	[V]	180...550 ±0 %	
Mains frequency	[Hz]	50 / 60 ±2	
Regeneration			
Rated output power *	[kVA]	18 (10.5)	45 (26)
Rated active power *	[kW]	17 (10)	42 (23)
Max. output power *	[kVA]	27 (15.5)	67.5 (39)
Max. active power *	[kW]	25.5 (15)	63 (34.5)
Regenerative rated current	[A]	26	65
Regenerative DC current	[A _{DC}]	32	80
Over load current (E.OL) 60 s	[A]	39	97.5
Max. regenerative DC current 60 s	[A _{DC}]	48	120
Supply			
Rated output power *	[kVA]	18 (10.5)	48.5 (28)
Rated active power *	[kW]	16 (10)	44.5 (25.5)
Max. output power *	[kVA]	27 (15.5)	72.5 (42)
Max. active power *	[kW]	24 (14.5)	67 (38)
Supply rated current (g = 0.95)	[A]	26	70
DC supply current	[A _{DC}]	32	87
Over load current (E.OL)	[A]	39	105
Max. DC supply current	[A _{DC}]	48	130
OC-tripping current	[A]	56	150
Dimensions (A x B x C)	[mm]	130 x 290 x 208	
Weight	[kg]	5.6	

* The values in brackets apply to the operation on 230 V power supply.

Commutation choke	Part-No.	15.Z1.B05-1000	19.Z1.B05-1000
Rated current	[A]	26	70
Overload	[%]	150	
Dimensions (A x B x C)	[mm]	180 x 75 x 240	243 x 115 x 290
Weight	[kg]	5.6	13.7
EMC filter (submounted)	Part-No..	15.E4.T60-1001	19.R6.T60-1001
Dimensions (A x B x C)	[mm]	132 x 352 x 50	198 x 422 x 65
Weight	[kg]	2.6	6
Harmonic filter THD ≤ 8%	Part-No..	15.Z1.C04-1000	19.Z1.C04-1000
Dimensions (A x B x C)	[mm]	291 x 214 x 257	352 x 307 x 326
Weight	[kg]	25.5	63


Synchronization cable 1m, part-no. **00.F5.0C3 – 4010**

Preassembled cable assembly on both sides RJ45, direct connection between commutation reactor – regenerative unit




Type of connections

- Supply / regenerative operation with DC-supplied drives – single drive

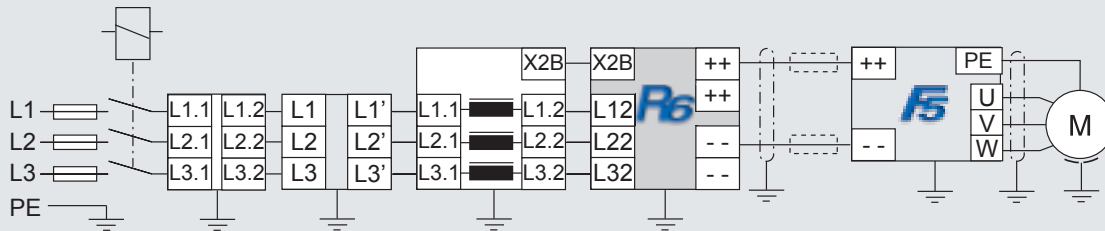

Operating condition: $\text{Inverter rating power} \leq \text{regenerative / supply power}$


- Supply / regenerative operation with DC-supplied drives – multi-axe application

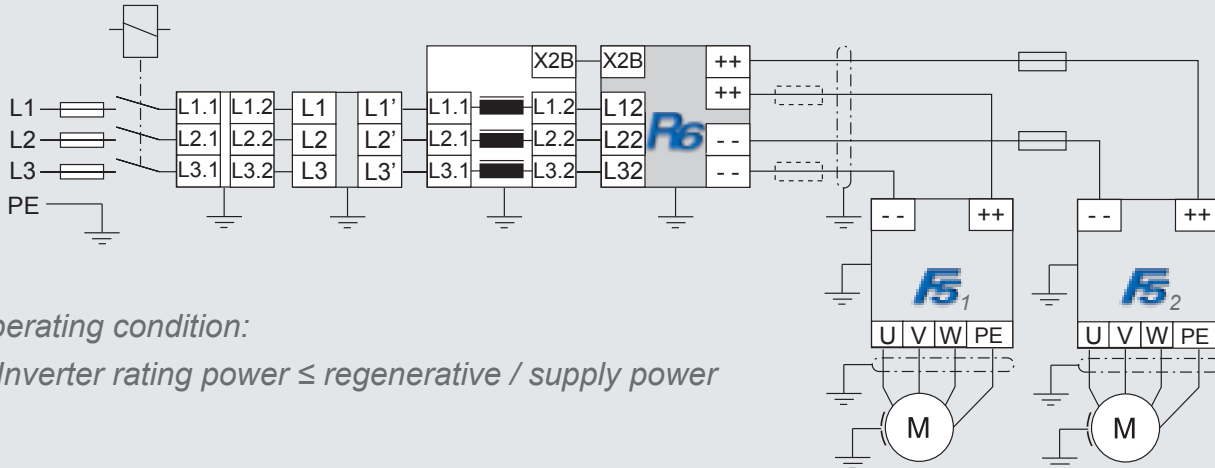

Operating condition:

$\sum \text{Inverter rating power} \leq \text{regenerative / supply power}$

- Parallel supply of drives – regenerative operation

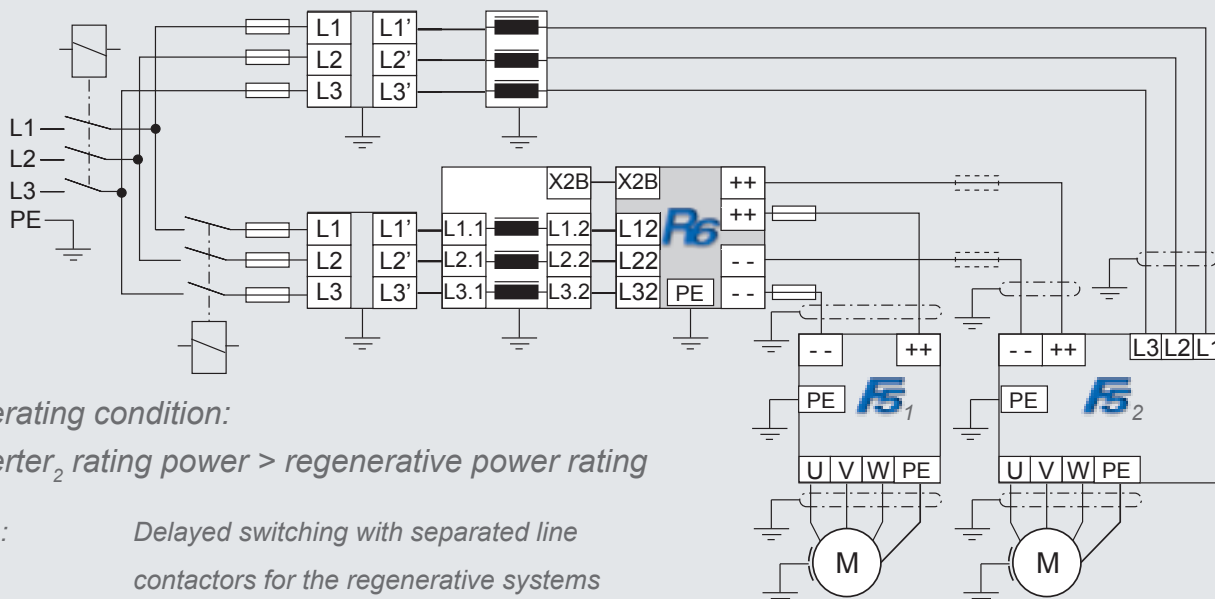

Operating condition:

$\text{Inverter}_2 \text{ rating power} > \text{regenerative power rating}$

Note: Delayed switching with separated line contactors for the regenerative systems
or: Use of decoupling diodes

people in motion



KEB Antriebstechnik Austria GmbH • Ritzstraße 8 • **A** - 4614 Marchtrenk
Tel.: +43 7243 53586-0 • FAX: +43 (0) 7243 53586-21
Internet: www.keb.at • E-Mail: info@keb.at



KEB Antriebstechnik Austria GmbH / Organizacni slozka • K. Weise 1675/5 • **CZ** - 37004 České Budějovice
Tel.: +420 38 76991-11 • FAX: +420 38 76991-19
Internet: www.keb.at • E-Mail: info@seznam.cz



KEB Antriebstechnik • Herenveld 2 • **B** - 9500 Geraardsbergen
Tel.: +32 5443 7860 • FAX: +32 5443 7898
E-Mail: vb.belgien@keb.de



KEB Power Transmission Technology (Shanghai) Co., Ltd - Office Room 401
No. 665 North Songwei Road (New Husong Road), Songjiang District • **CHN** - 201613 Shanghai, P.R. China
Tel.: +86 21 51095995 • FAX: +86 21 54450115 • Internet: www.keb.cn • E-Mail: info@keb.cn



Société Française KEB • Z.I. de la Croix St. Nicolas • 14, rue Gustave Eiffel • **F** - 94510 LA QUEUE EN BRIE
Tél.: +33 1 49620101 • FAX: +33 1 45767495
Internet: www.keb.fr • E-Mail: info@keb.fr



KEB (UK) Ltd. • 6 Chieftain Buisness Park, Morris Close • Park Farm, Wellingborough, **GB** - Northants, NN8 6 XF
Tel.: +44 1933 402220 • FAX: +44 1933 400724
Internet: www.keb-uk.co.uk • E-Mail: info@keb-uk.co.uk



KEB Italia S.r.l. • Via Newton, 2 • **I** - 20019 Settimo Milanese (Milano)
Tel.: +39 02 33535311 • FAX: +39 02 33500790
Internet: www.keb.it • E-Mail: info@keb.it



KEB - YAMAKYU Ltd. • 15 - 16, 2-Chome • Takanawa Minato-ku • **J** - Tokyo 108 - 0074
Tel.: +81 33 445-8515 • FAX: +81 33 445-8215
Internet: www.keb.jp • E-Mail: info@keb.jp



KEB KOREA • Representative Office, Room 1709, 415 Missy 2000, 725 Su Seo Dong, Gang Nam Gu
ROK - 135-757 Seoul / South Korea
Tel.: +82 2 6253-6771 • FAX: + 82 (0) 2 6253-6770 • E-Mail: vb.korea@keb.com



KEB Sverige • Box 265 (Bergavägen 19) • **S** - 43093 Hälsö
Tel.: +46 31 961520 • FAX: +46 31 961124
E-Mail: vb.schweden@keb.de



KEB España • C / Mitjer, Nave 8 Poligono Industrial "La masia" • **E** - 08798 Sant Cugat Sesgarrigues (Barcelona)
Tel.: +34 93 8970268 • FAX: +34 93 8992035
E-Mail: vb.espana@keb.de



KEB Taiwan Ltd. • No. 8, Lane 89, Sec. 3, Taichung Kang Rd. • **R.O.C.** - Taichung City Taiwan
Tel.: +886 4 23506488 • FAX: +886 4 23501403
E-Mail: info@keb.com.tw



KEB America, Inc. • 5100 Valley Industrial Blvd. South • **USA** - Shakopee, MN 55379
Tel.: +1 952 2241400 • FAX: +1 952 2241499
Internet: www.kebamerica.com • E-Mail: info@kebamerica.com



KEB Antriebstechnik GmbH • Wildbacher Str. 5 • **D** - 08289 Schneeberg
Telefon +49 3772 67-0 • Telefax +49 3772 67-281
Internet: www.keb.de • E-Mail: info@keb-combidrive.de



Karl E. Brinkmann GmbH
Försterweg 36 - 38 • **D** - 32683 Barntrup
Telefon +49 (0) 5263 401-0 • Telefax +49 (0) 5263 401-116
Internet: www.keb.de • E-Mail: info@keb.de