

Absolute Encoders – Multiturn

Standard
ATEX/IECEX – Zone 1/21, mechanical Multiturn, optical


Sendix 7063 (Shaft)

SSI / BiSS-C + SinCos



The Sendix 7063 absolute multiturn encoders offer Ex protection in a compact 70 mm seawater resistant housing, with an SSI or BiSS-C interface and optical sensor technology.

These shock and vibration-resistant encoders operate flexibly with a resolution of up to 29 bits; they are also available with axial and radial cable outlets.

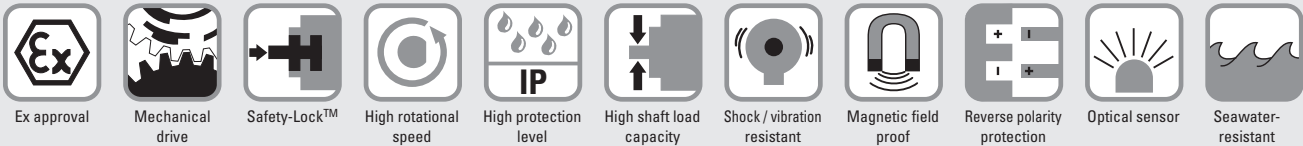

Compact and safe

- Can be used even when space is tight
- Minimal installation depth, diameter 70 mm
- Compact cable outlet axial or radial
- Can be operated in marine environments – housing and flange manufactured from seawater-resistant aluminium
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection)

Explosion protection

- “Flameproof-enclosure” version
- ATEX with EC type examination certificate
- IECEx with Certificate of Conformity (CoC)

Order code 8.7063 . 1 X 2 X . X X 2 1 . XXXX
Shaft version Type a b c d e f g h i ¹⁾

- | | | |
|---|--|---|
| <p>a Flange
1 = clamping-synchronous flange, IP67, ø 70 mm [2.76"]</p> <p>b Shaft (ø x L)
2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway for 4 x 4 mm [0.16 x 0.16"] key</p> <p>c Interface / Power supply
2 = SSI or BiSS-C / 10 ... 30 V DC</p> <p>d Type of connection
1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']
preferred length see i, e. g.: 0100 = 10 m [32.81']</p> | <p>e Code
B = SSI, Binary
C = BiSS-C, Binary
G = SSI, Gray</p> <p>f Resolution ²⁾
A = 10 bit ST + 12 bit MT
1 = 11 bit ST + 12 bit MT
2 = 12 bit ST + 12 bit MT
3 = 13 bit ST + 12 bit MT
4 = 14 bit ST + 12 bit MT
7 = 17 bit ST + 12 bit MT</p> | <p>g Inputs / Outputs ²⁾
2 = SET, DIR input
additional status output</p> <p>h Options
1 = no option</p> <p>i Cable length in dm ¹⁾
0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']</p> <p style="text-align: right;"><i>optional on request
- special cable length</i></p> |
|---|--|---|

Mounting accessory for shaft encoders

Order No.

Coupling

Bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]

8.0000.1101.1010

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology

1) Not applicable with connection types 1 and 2
2) Resolution, preset value and counting direction factory-programmable

Absolute Encoders – Multiturn

Standard ATEX/IECEX – Zone 1/21, mechanical Multiturn, optical	Sendix 7063 (Shaft)	SSI/BiSS-C + SinCos
---	----------------------------	----------------------------

Technical data

Explosion protection ATEX	
EC type-examination certificate	PTB09 ATEX 1106 X
Category (gas)	II 2 G Ex d IIC T4 - T6 Gb
Category (dust)	II 2D Ex tb IIIC T135°C - T85°C Db IP6x
Directive 94/9/EC	EN 60079-0: 2009; EN 60079-1: 2007; EN 60079-31: 2009

Explosion protection IECEX	
Certificate of Conformity (CoC)	IECEX PTB 13.0026 X
Category (gas)	Ex d IIC T4 - T6 Gb
Category (dust)	Ex tb IIIC T135°C - T85°C Db IP6x
IECEX	IEC 60079-0:2007; IEC 60079-1:2007; IEC 60079-31:2008

Mechanical characteristics	
Max. speed	continuous 6 000 min ⁻¹
Starting torque – at 20°C [68°F]	< 0.05 Nm
Moment of inertia	4.0 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial 80 N axial 40 N
Weight	approx. 1.3 kg [45.86 oz]
Protection acc. to EN 60529	IP67
Working temperature range	-40°C ... +60°C [-40 ... +140°F]
Materials	shaft stainless steel flange / housing seawater-resistant Al, type AISiMgMn (EN AW-6082) cable stainless steel on request PUR
Shock resistance acc. EN 60068-2-27	2500 m/s ² , 6 ms
Vibration resistance acc. EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz

Electrical characteristics	
Power supply	10 ... 30 V DC
Current consumption (no load)	max. 45 mA
Reverse polarity protection for power supply (+V)	yes
Short-circuit proof outputs	yes ¹⁾
CE compliant acc. to	EMC guideline 2004/108/EC ATEX guideline 94/9/EC
RoHS compliant acc. to	guideline 2011/65/EU

DIR input	
A HIGH signal switches the direction of rotation from the default CW to CCW. The reverse function can also be factory-programmed.	
If DIR is reversed when the device is already switched on, this will be interpreted as an error. The status output switches to LOW.	

Power-ON delay	
After Power-ON, the device requires a time of approximately 150 ms before valid data can be read.	

SSI interface	
Output driver	RS485 transceiver type
Permissible load/channel	max. 20 mA
Signal level	HIGH typ 3.8 V LOW at I _{Load} = 20 mA typ 1.3 V
Singleturn resolution	10...14 bit and 17 bit ²⁾
Number of revolutions	4096 (12 bit)
Code	Binary or Gray
SSI clock rate	50 kHz ... 2 MHz
Monoflop time	< 15 μs ²⁾
Note: if clock starts cycling within monoflop time a second data transfer starts with the same data. If clock starts cycling after monoflop time, the data transfer starts with updated values. The update rate depends on clock speed, data length and monoflop time.	
Data refresh rate	ST resolution ≤ 14 bit < 1 μ ST resolution ≥ 15 bit < 4 μs
Status and parity bit	on request

BiSS-C interface	
Singleturn resolution	10 ... 14 bit and 17 bit ²⁾
Number of revolutions	4096 (12 bit)
Code	Binary
Clock rate	up to 10 MHz
Max. update rate	< 10 μs, depends on the clock rate and the data length
Data refresh rate	≤ 1 μs
Note:	– Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings – CRC data verification

SET input	
Input	HIGH active
Input type	Comparator
Signal level (+V = Power supply)	HIGH min. 60 % of +V max. +V LOW max. 25 % of +V
Input current	< 0.5 mA
Min. pulse duration (SET)	10 ms
Timeout after SET signal	14 ms
Response time (DIR input)	1 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal delay time of approximately 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approximately 15 ms before the new position data can be read.

Status output	
Output driver	Open Collector, internal pull-up resistor 22 kOhm
Permissible load	max. 20 mA
Signal level	HIGH +V LOW < 1 V
Active at	LOW

The status output serves to display various alarm or error messages. The status output is HIGH (Open Collector with internal pull-up 22k) in normal operation.

1) Short-circuit with 0 V or output, only one channel at a time, power supply correctly applied
2) Other options on request

Absolute Encoders – Multiturn

Standard
ATEX/IECEX – Zone 1/21, mechanical Multiturn, optical

Sendix 7063 (Shaft)

SSI/BiSS-C+ SinCos

Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)											
			Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	⊥	⊥
2	1, 2, A, B	SET, DIR	Cable Marking:	1	2	3	4	5	6	7	8	9	YE/GN	shield

+V: Encoder power supply +V DC

0 V: Encoder power supply ground GND (0 V)

C+, C-: Clock signal

D+, D-: Data signal

SET: Set input. The current position becomes defined as position zero.

DIR: Direction input: If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.

Stat: Status output

⊥: Protective earth

Dimensions


Dimensions in mm [inch]

Clamping-synchronous flange, ø 70 [2.76]

Shaft type 1 with axial cable outlet

1 6 x M4, 10 [0.39] deep

2 Keyway for DIN 6885-A-4x4x25 key

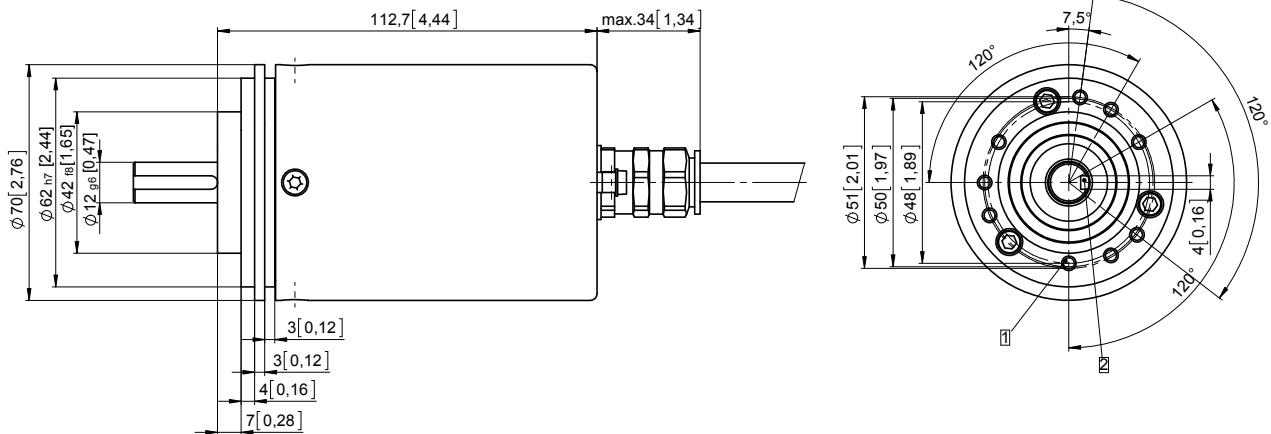

Clamping-synchronous flange, ø 70 [2.76]

Shaft type 2 with radial cable outlet

1 6 x M4, 10 [0.39] deep

