

nsb Chain - Normal type

>> General information

Item	Value
Material	CPS-Amid(PA6+GF), RoHs
Speed	5 ^{m/s}
Acceleration	15 ^{m/s²}
Temperature	-30℃ ~+130℃
Special production	ESD, UV, Customized color
Certificate	CE, ATEX(Ex)

>> Calculation table

Item	Value
Length of Cable Chain	$L = \frac{1}{2} \times LS + LP$
Bending Radius	
The biggest Cable inserted	Multiply 8~10 and the biggest cable
The biggest Hydraulic Hose inserted	Multiply 15~20 and the biggest hose


>> Dimension table

nsb Chain N Type	Pitch	Bending Radius (R)	Weight kg/m	Speed m/s	Temperature ℃	Size				Frame style	Section - composition
						A	B	C	D		
nsb 028N	28	46, 66, 86, 116, 146	0.79	5	-30 ~ +130	55	38	35	26		
			0.82			70		50			
			0.85			75		55			
			0.90			95		75			
			0.98			120		100			
			1.08			145		125			
			1.18			170		150			
			1.45			195		175			
			1.59			220		200			
nsb 035N	35	55, 65, 90, 115, 140, 190	1.10	5	-30 ~ +130	55	52	35	40		
			1.13			70		50			
			1.15			75		55			
			1.18			95		75			
			1.25			120		100			
			1.32			145		125			
			1.41			170		150			
			1.62			195		175			
			1.72			220		200			
nsb 045N	45	90, 110, 135, 165, 185, 235, 285	2.06	5	-30 ~ +130	80	66	50	45		
			2.14			105		75			
			2.22			130		100			
			2.32			155		125			
			2.38			170		140			
			2.42			180		150			
			2.47			195		165			
			2.51			205		175			
			2.72			220		190			
			2.86			230		200			
			3.09			270		240			
			3.15			280		250			
			3.43			330		300			
nsb 060N	60	125, 135, 150, 180, 230, 270, 340	3.30	5	-30 ~ +130	115	82	75	56		
			3.35			140		100			
			3.51			165		125			
			3.60			190		150			
			3.69			215		175			
			3.78			230		190			
			3.84			240		200			
			4.01			280		240			
			4.05			290		250			
			4.26			340		300			
			4.57			390		350			
			4.85			440		400			
nsb 075N	75	160, 180, 230, 280, 330, 380, 480	4.80	5	-30 ~ +130	115	108	75	78		
			4.90			140		100			
			4.97			155		115			
			5.02			165		125			
			5.12			190		150			
			5.25			215		175			
			5.46			240		200			
			5.67			280		240			
			5.72			290		250			
			6.02			330		290			
			6.09			340		300			
			6.45			390		350			
			6.83			440		400			
			7.12			490		450			
			7.32			540		500			
			8.06			590		550			
			8.20			640		600			


(Dimensions in mm)

>> Ordering

nsb 028N, 50, R66 / F - 1000L : 10ST

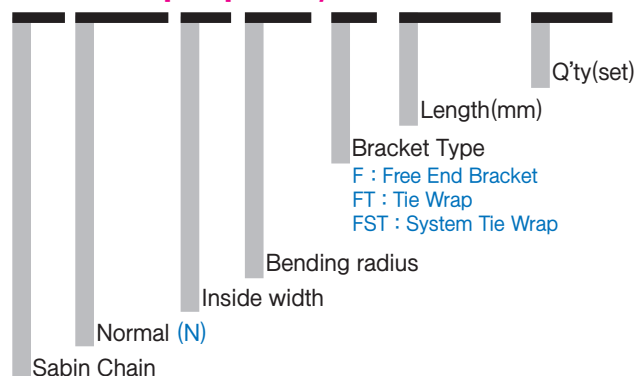

>> Bracket type





>> Application of nsb Chain Normal type

- nsb Chain can be applied to all kinds of machine tools and factory lines.

▶ NSB 045N & 035N

Application
Machine tools
Location
Korea
Remark
Stroke : 2 meters

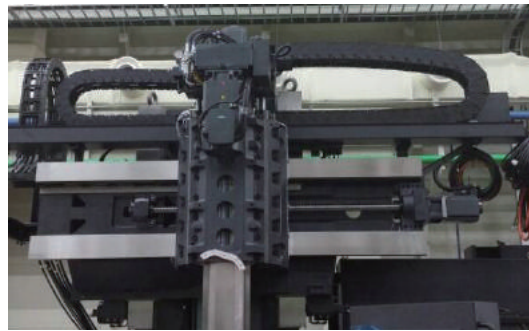

▶ NSB 060N

Application
Machine tools
Location
Korea
Remark
Stroke : 2 meters




▶ NSB 045N

Application
Factory production line
Location
Korea


- CPS can produce customized product for customers for ESD and special color.

▶ NSB 035N **Application**
PCTC Ship
Location
Korea (H-heavy industry)
Remark
ESD, Orange color

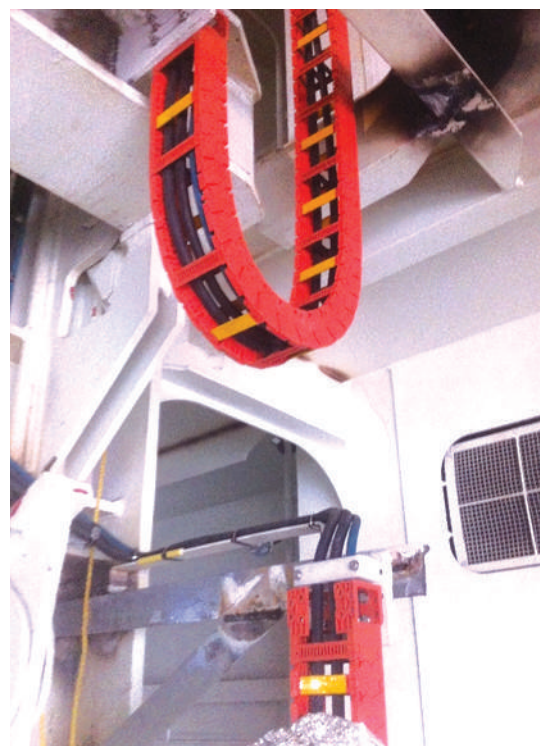


nsb Chain - Normal type

>> Part of nsb Chain Normal type

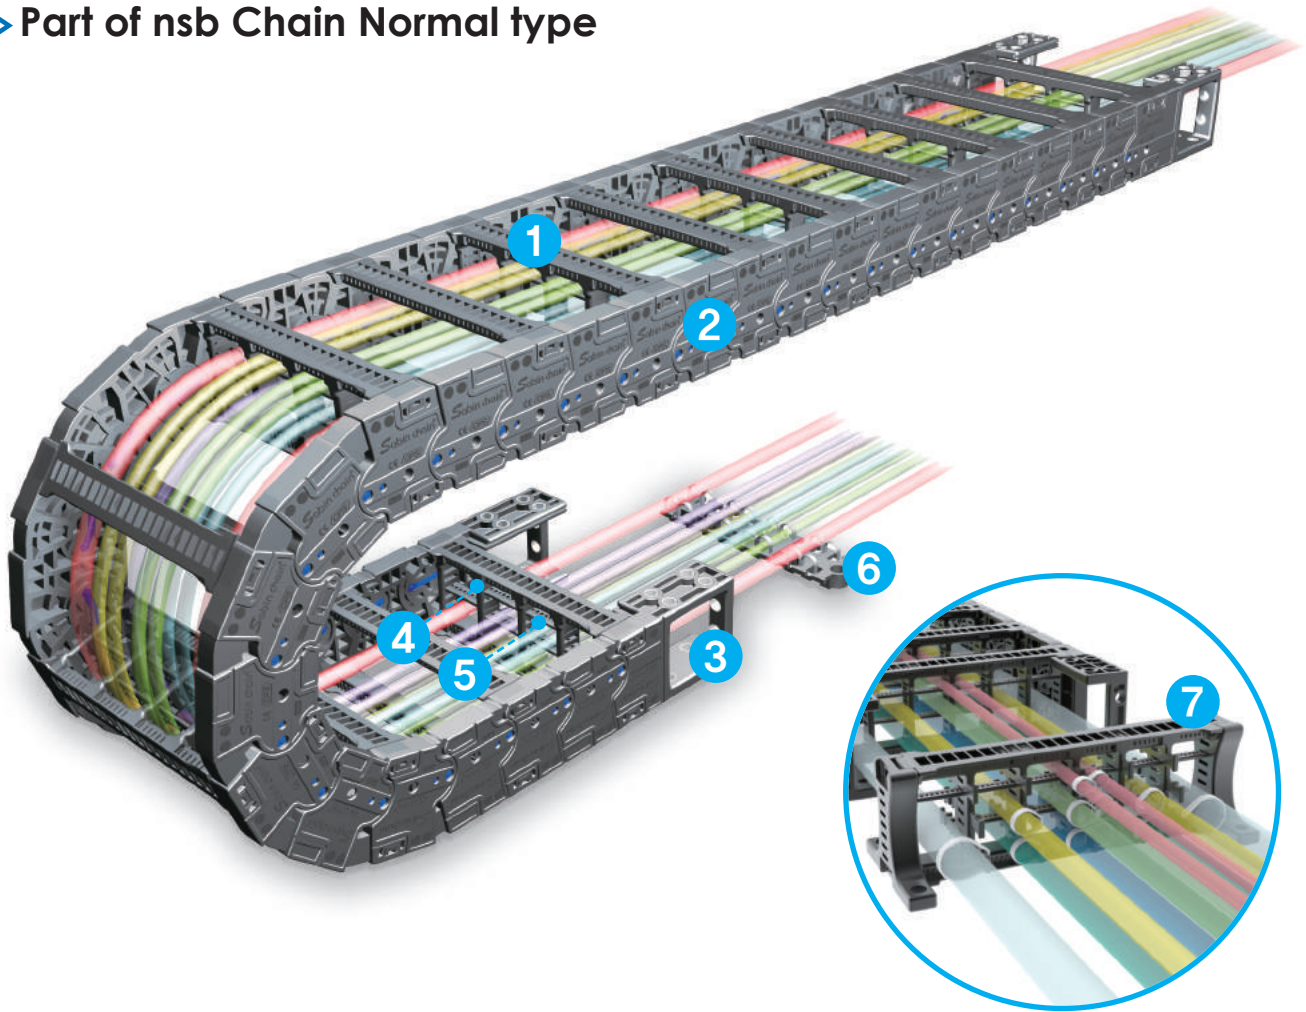

1 Frame (FR)

Hinged-type frame, open one side, supports connection of both side of side band and have tongue and groove system plate to secure the position of the divider on the frame.




2 Side Band (SB)

It's part of cable chain that each side band's connected by holding band.

3 FREE END BRACKET (FEB)

A unit that connects at last side band (left&right). It can be fixed stronger using steel washers.



4 Dividers (DV)



Divider sets the inside of chain vertically to prevent cable from twisting and sheath damage caused by friction. There are S, M, R and T type.

5 Separators (SP)

A unit that divides inserted cables vertically to prevent twisting and breaking problem.

6 Tie wrap (TW)

A unit that ties cables to maintain straightness of them. It can be assembled to bracket directly or installed separately from bracket.




7 System tie wrap (STW)


System-Tie Wrap has to be assembled on fixing and moving point of bracket and can be assembled without any tie wrap plate. This tie wrap is used to stay the cables on several floors prevent the cables from being twisting and it can also be assemble without any tools or bolt. This tie wrap has two types, one is to assemble inside bracket the other one is outside.

>> Assembly procedure of nsb Chain Normal Type


The assembling process of CR-Type of New Sabin Chain is like below and user must use rubber hammer with careful combination of Divider and Separator.

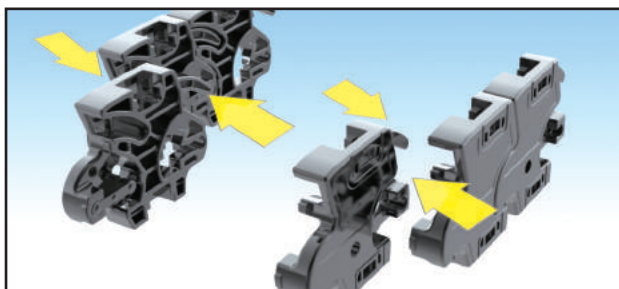


1 Connect each side band as many as you need.

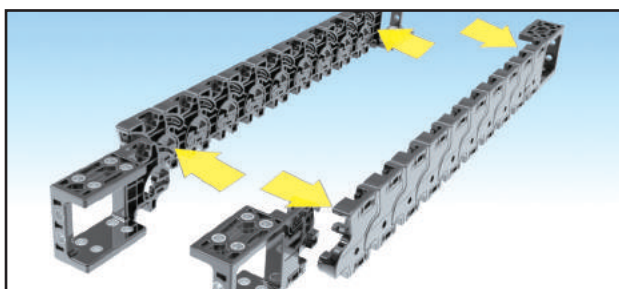


2 Assemble the end brackets on both ends.

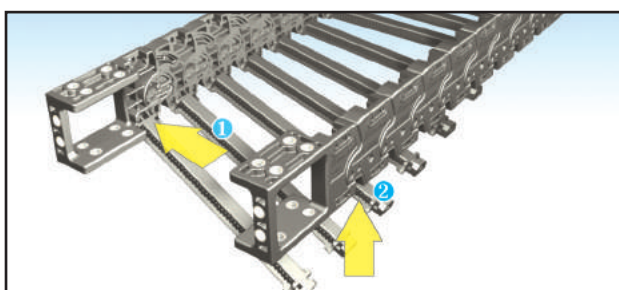


3 Attach frames to one side groove on the frames, then the other side.

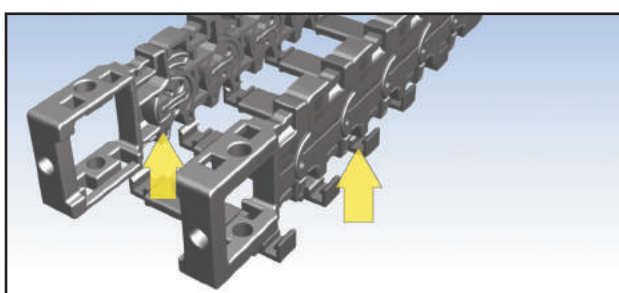


3-1 For nsb020CR and nsb022CR, they are not Hinge Type for method to connect frames, but Hook Type on both sides.

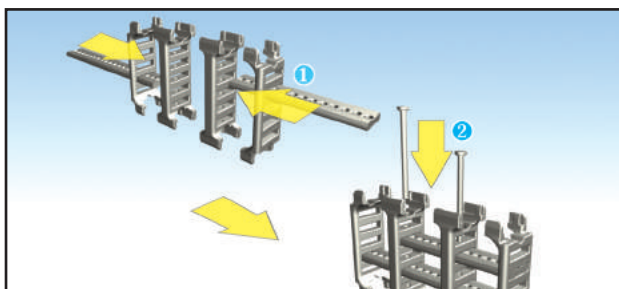


4 For nsb 045, 060, and 075, connect the pin of separator in hole of divider after inserting separator in hole of divider. For nsb028 and nsb035, separator fixing pins are not used.

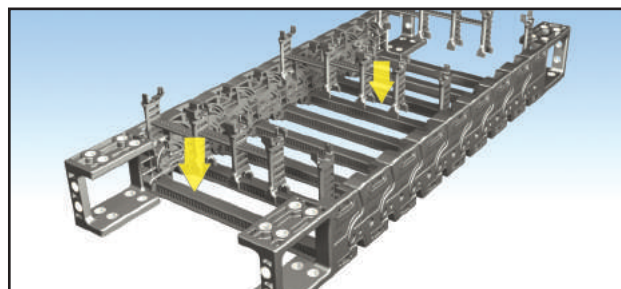


5 Fix the separator and divider patterns to the bottom-side frames as needed.

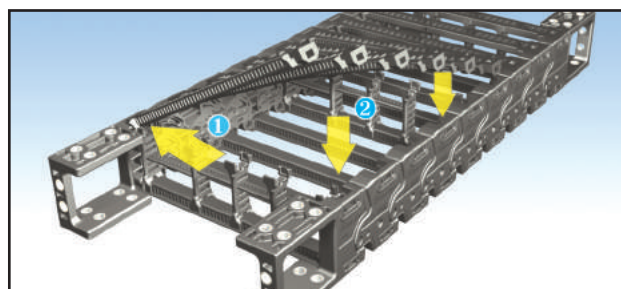


6 Attach frames to one side groove on the frames, then the other side.

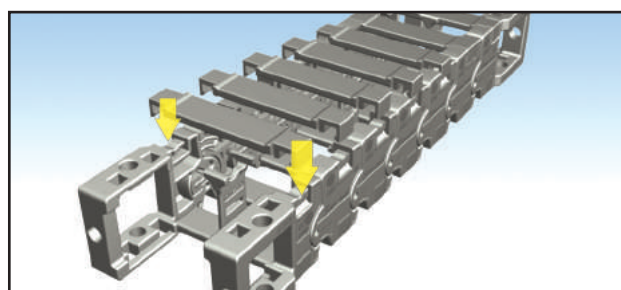

6-1 For nsb020CR and nsb022CR, they are not Hinge Type for method to connect frames, but Hook Type on both sides.

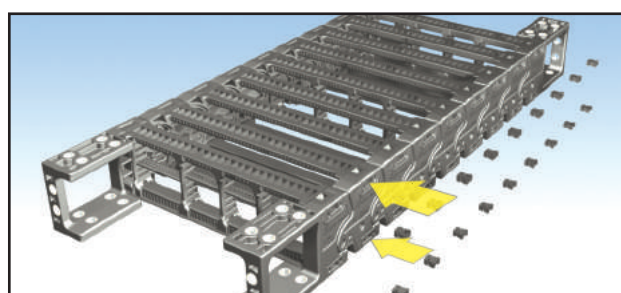

7 Insert frame pins to secure the frames and complete carrier. (nsb045, 060, 075 are applied with frame pin, and nsb028, 035 are Hinge Type or Hook Type without frame pin.)

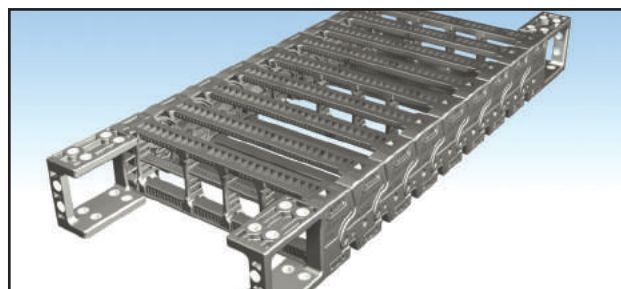

8 Complete to assemble New Sabin CR-Type, Sabin Chain.

nsb Chain - Normal type

>> Part list of nsb Chain Normal type

- Composition of Cable chain(Standard)
= Side band(RH) + Frame + Side band(LH) + Bending radius Unit + Free end bracket
 - M divider(normal divider) should be applied every second frames to make a section composition.
- ※ Please refer to below part list and description to understand composition of cable chain.


Model	Classification	Part number	Description
nsb028N	SIDE BAND	nsb-SB028N,R*(RH) nsb-SB028N,R*(LH)	Left side band of nsb028N Right side band of nsb028N
	FRAME	sb-FR/M.35	Frame, 35mm
		sb-FR/M.50	Frame, 50mm
		sb-FR/M.55	Frame, 55mm
		sb-FR/M.75	Frame, 75mm
		sb-FR/M.100	Frame, 100mm
		sb-FR/M.125	Frame, 125mm
		sb-FR/M.150	Frame, 150mm
		sb-FR/M.175	Frame, 175mm
		sb-FR/M.200	Frame, 200mm
	FREE END BRACKET	nsb-FEB028N	End bracket of nsb028N
	DIVIDER	sb-DV028/M	Normal divider
		sb-DV028/S	To fix separstors at the both side section
	SEPARATOR	S-SP/M.35	Separator, 35mm
		S-SP/M.50	Separator, 50mm
		S-SP/M.75	Separator, 75mm
		S-SP/M.100	Separator, 100mm
		S-SP/M.125	Separator, 125mm
		S-SP/M.150	Separator, 150mm
		S-SP/M.175	Separator, 175mm
		S-SP/M.200	Separator, 200mm
	TIE WRAP	S-TW036/025CR.35	Tie wrap for end bracket to fix cables, 35mm
		S-TW036/025CR.55	Tie wrap for end bracket to fix cables, 55mm
		S-TW036/025CR.75	Tie wrap for end bracket to fix cables, 75mm
		S-TW036/025CR.100	Tie wrap for end bracket to fix cables, 100mm
		S-TW036/025CR.125	Tie wrap for end bracket to fix cables, 125mm
	SYSTEM TIE WRAP	sb-DV028/W S-TWEB028	Divider for fixing cables at end bracket System tie wrap to arrange for cables right after moving bracket or fixing bracket

Model	Classification	Part number	Description
nsb035N	SIDE BAND	nsb-SB035N,R*(LH) nsb-SB035N,R*(RH)	Left side band of nsb035N Right side band of nsb035N
	FRAME	sb-FR/M.35	Frame, 35mm
		sb-FR/M.50	Frame, 50mm
		sb-FR/M.55	Frame, 55mm
		sb-FR/M.75	Frame, 75mm
		sb-FR/M.100	Frame, 100mm
		sb-FR/M.125	Frame, 125mm
		sb-FR/M.150	Frame, 150mm
		sb-FR/M.175	Frame, 175mm
		sb-FR/M.200	Frame, 200mm
	FREE END BRACKET	nsb-FEB035N	End bracket of nsb035N
	DIVIDER	sb-DV035/M	Normal divider
		sb-DV035/S	To fix separstors at the both side section
	SEPARATOR	S-SP/M.35	Separator, 35mm
		S-SP/M.50	Separator, 50mm
		S-SP/M.75	Separator, 75mm
		S-SP/M.100	Separator, 100mm
		S-SP/M.125	Separator, 125mm
		S-SP/M.150	Separator, 150mm
		S-SP/M.175	Separator, 175mm
		S-SP/M.200	Separator, 200mm
	TIE WRAP	S-TW050/035N.50	Tie wrap for end bracket to fix cables, 50mm
		S-TW050/035N.75	Tie wrap for end bracket to fix cables, 75mm
		S-TW050/035N.100	Tie wrap for end bracket to fix cables, 100mm
		S-TW050/035N.125	Tie wrap for end bracket to fix cables, 125mm
		S-TW050/035N.150	Tie wrap for end bracket to fix cables, 150mm
		S-TW050/035N.175	Tie wrap for end bracket to fix cables, 175mm
		S-TW050/035N.200	Tie wrap for end bracket to fix cables, 200mm
	SYSTEM TIE WRAP	sb-DV035/W S-TWEB035	Divider for fixing cables at end bracket System tie wrap to arrange for cables right after moving bracket or fixing bracket


Model	Classification	Part number	Description
nsb045N	SIDE BAND	nsb-SB045N,R*(LH) nsb-SB045N,R*(RH)	Left side band of nsb045N Right side band of nsb045N
	FRAME PIN	S-FP/S1	Frame pin
	FRAME	sb-FR/M.50	Frame, 50mm
		sb-FR/M.75	Frame, 75mm
		sb-FR/M.100	Frame, 100mm
		sb-FR/M.125	Frame, 125mm
		sb-FR/M.140	Frame, 140mm
		sb-FR/M.150	Frame, 150mm
		sb-FR/M.165	Frame, 165mm
		sb-FR/M.175	Frame, 175mm
		sb-FR/M.190	Frame, 190mm
		sb-FR/M.200	Frame, 200mm
		sb-FR/M.240	Frame, 240mm
		sb-FR/M.250	Frame, 250mm
		sb-FR/M.300	Frame, 300mm
	FREE END BRACKET	nsb-FEB045N	End bracket of nsb045N
		sb-FEB/WH045	Steel washer for end bracket
	DIVIDER	sb-DV045/M	Normal divider
		sb-DV045/S	To fix separstors at the both side section
	SEPARATOR	sb-DV045/T	T divider
		sb-SP/400.400 SP-PIN045	Separator, 400mm Separator pin to fix
	TIE WRAP	S-TW50	Tie wrap for end bracket to fix cables, 50mm
		S-TW75	Tie wrap for end bracket to fix cables, 75mm
		S-TW100	Tie wrap for end bracket to fix cables, 100mm
		S-TW125	Tie wrap for end bracket to fix cables, 125mm
		S-TW150	Tie wrap for end bracket to fix cables, 150mm
	SYSTEM TIE WRAP	sb-DV045/W S-TWEB045	Divider for fixing cables at end bracket System tie wrap to arrange for cables right after moving bracket or fixing bracket

Model	Classification	Part number	Description
nsb060N	SIDE BAND	nsb-SB060N,R*(LH) nsb-SB060N,R*(RH)	Left side band of nsb060N Right side band of nsb060N
	FRAME PIN	S-FP/S1	Frame pin
	FRAME	sb-FR/M.75	Frame, 75mm
		sb-FR/M.100	Frame, 100mm
		sb-FR/M.125	Frame, 125mm
		sb-FR/M.150	Frame, 150mm
		sb-FR/M.175	Frame, 175mm
		sb-FR/M.190	Frame, 190mm
		sb-FR/M.200	Frame, 200mm
		sb-FR/M.230	Frame, 230mm
		sb-FR/M.250	Frame, 250mm
		sb-FR/M.300	Frame, 300mm
		sb-FR/M.350	Frame, 350mm
		sb-FR/M.400	Frame, 400mm
	FREE END BRACKET	nsb-FEB060N	End bracket of nsb060N
		sb-FEB/WH060	Steel washer for end bracket
	DIVIDER	sb-DV060/M	Normal divider
		sb-DV060/S	To fix separstors at the both side section
		sb-DV060/R	Roller divider to reduce friction with cables, Clean room type
		sb-DV060/T	T divider
		sb-DV060/TP	T divider pin
	SEPARATOR	sb-SP/400,400	Separator, 400mm
		SP-PIN060	Separator pin to fix
	TIE WRAP	S-TW50	Tie wrap for end bracket to fix cables, 50mm
		S-TW75	Tie wrap for end bracket to fix cables, 75mm
		S-TW100	Tie wrap for end bracket to fix cables, 100mm
		S-TW125	Tie wrap for end bracket to fix cables, 125mm
		S-TW150	Tie wrap for end bracket to fix cables, 150mm
	SYSTEM TIE WRAP	sb-DV060/W	Divider for fixing cables at end bracket
		S-TW,EB060	System tie wrap to arrange for cables right after moving bracket or fixing bracket


Model	Classification	Part number	Description
nsb075N	SIDE BAND	nsb-SB075N,R*(LH) nsb-SB075N,R*(RH)	Left side band of nsb075N Right side band of nsb075N
	FRAME PIN	S-FP/S2	Frame pin
	FRAME	sb-FR075/100.75	Frame, 75mm
		sb-FR075/100.100	Frame, 100mm
		sb-FR075/100.115	Frame, 115mm
		sb-FR075/100.125	Frame, 125mm
		sb-FR075/100.150	Frame, 150mm
		sb-FR075/100.175	Frame, 175mm
		sb-FR075/100.200	Frame, 200mm
		sb-FR075/100.240	Frame, 240mm
		sb-FR075/100.250	Frame, 250mm
		sb-FR075/100.290	Frame, 290mm
		sb-FR075/100.300	Frame, 300mm
		sb-FR075/100.350	Frame, 350mm
		sb-FR075/100.400	Frame, 400mm
		sb-FR075/100.450	Frame, 450mm
		sb-FR075/100.500	Frame, 500mm
		sb-FR075/100.550	Frame, 550mm
		sb-FR075/100.600	Frame, 600mm
	FREE END BRACKET	nsb-FEB075N	End bracket of nsb075N
		sb-FEB/WH075	Steel washer for end bracket
	DIVIDER	sb-DV075/M	Normal divider
		sb-DV075/S	To fix separstors at the both side section
		sb-DV075/R	Roller divider to reduce friction with cables, Clean room type
		sb-DV075/T	T divider
		sb-DV075/TP	T divider pin
	SEPARATOR	sb-SP/400,400	Separator, 400mm
		SP-PIN075	Separator pin to fix
	TIE WRAP	S-TW50	Tie wrap for end bracket to fix cables, 50mm
		S-TW75	Tie wrap for end bracket to fix cables, 75mm
		S-TW100	Tie wrap for end bracket to fix cables, 100mm
		S-TW125	Tie wrap for end bracket to fix cables, 125mm
		S-TW150	Tie wrap for end bracket to fix cables, 150mm
	SYSTEM TIE WRAP	sb-DV075/W	Divider for fixing cables at end bracket
		S-TW,EB075	System tie wrap to arrange for cables right after moving bracket or fixing bracket

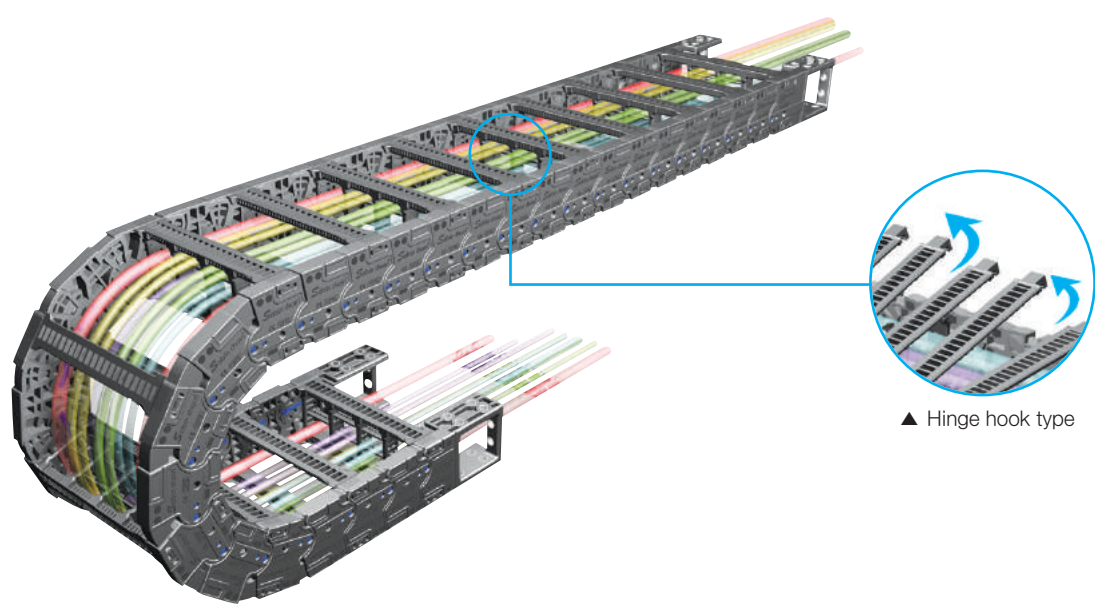


▲ Hinge hook type

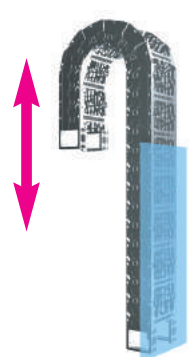

Vertical with curve above



Vertical with curve below




Horizontal application mounted on its side

» Calculation of the chain length

$$\left[L = \frac{L_s}{2} + L_p \right]$$


» Load diagrams self-supporting length

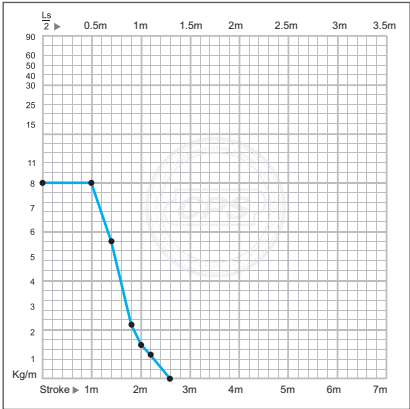

» Other installation length

Vertical curve above = max 2,0m
Vertical curve below = max 40m
Side Mounted, Unsupported = max 1,0m


» Layout of the chain

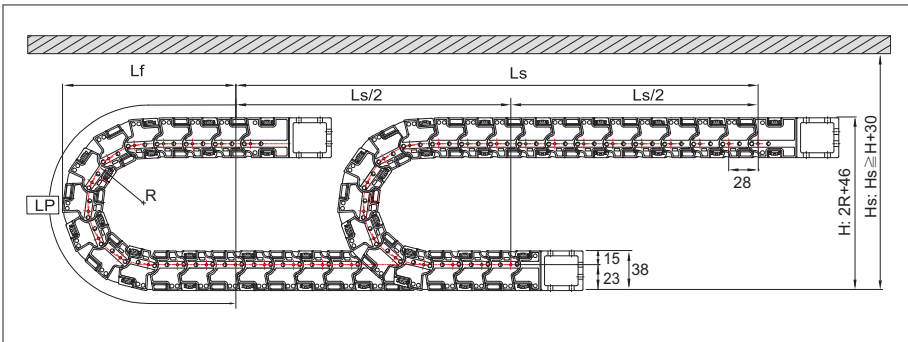

Bending Radius (R)	Lp Loop Length	Lf Loof Projection	H Moving Height
46	313	153	138
66	376	173	178
86	439	193	218
116	533	223	278
146	627	253	338

(Dimensions in mm)


» Chain cross section

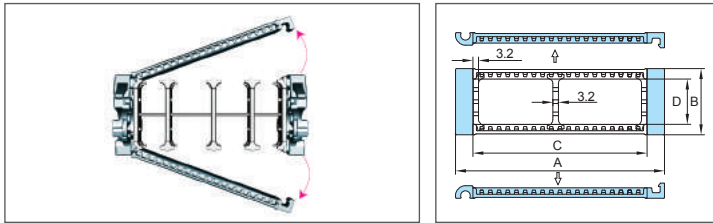

Chain Type	A Width (Outer)	B Height (Outer)	C Frame	D Height (Inner)	Weight kg/m
nsb 028N	55	38	35	26	0.79
	70		50		0.82
	75		55		0.85
	95		75		0.90
	120		100		0.98
	145		125		1.08
	170		150		1.18
	195		175		1.45
	220		200		1.59

(Dimensions in mm)


» Free end bracket

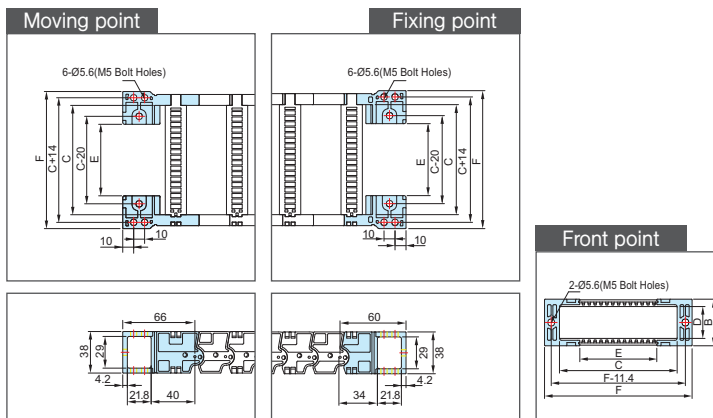


Chain Type	F Width(Outer)	B Height(Outer)	C Frame	D Height(Inner)	E M,EB Bolt hole width	Hole Type
nsb 028N	60.4	38	35	26	0.4	M5 Bolt Holes
	75.4		50		15.4	
	80.4		55		20.4	
	100.4		75		40.4	
	125.4		100		65.4	
	150.4		125		90.4	
	175.4		150		115.4	
	200.4		175		140.4	
	225.4		200		165.4	

(Dimensions in mm)

» System tie wrap (STW)

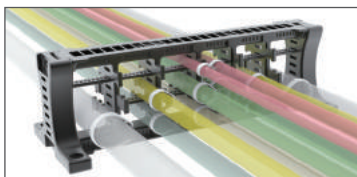


It is a unit to classify each cable for preventing entanglement of cables. It can either be installed to free end bracket or installed separately according its application environment.

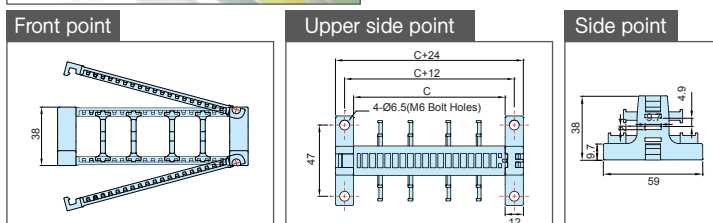


Chain Type	Ordering No.	C Frame	Hole Type
nsb 028N	S-TWEB028.35	35	M6 Bolt Holes
	S-TWEB028.50	50	
	S-TWEB028.55	55	
	S-TWEB028.75	75	
	S-TWEB028.100	100	
	S-TWEB028.125	125	
	S-TWEB028.150	150	
	S-TWEB028.175	175	
	S-TWEB028.200	200	

(Dimensions in mm)

» Dividers(DV)

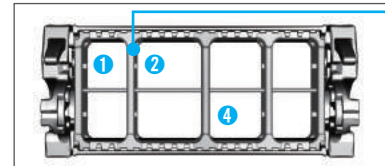


Assemble divider every second frame.
DV.T : Applied to Frame 125~200.
DV.M : Normal Divider.
DV.W : Applicable to System Tie Wrap or FEB.

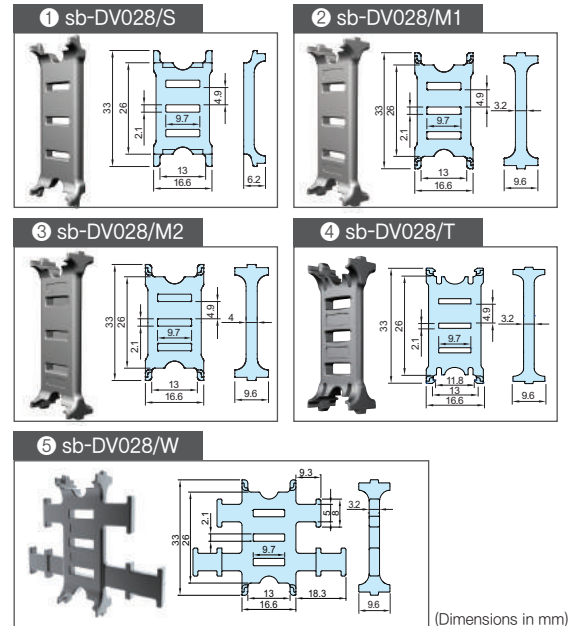



(Dimensions in mm)

» Separators(SP)

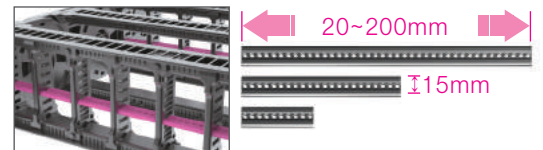


Chain Type	Ordering NO.	Frame
nsb 028N	S-SP/M.35	35
	S-SP/M.50	50
	S-SP/M.55	55
	S-SP/M.75	75
	S-SP/M.100	100
	S-SP/M.125	125
	S-SP/M.150	150
	S-SP/M.175	175
	S-SP/M.200	200


» Tie wrap (TW)




Chain Type	Ordering No.	A	B	C
nsb 028N	S-TW036/025CR.35	46	35.4	-
	S-TW036/025CR.50	69	48.9	15
	S-TW036/025CR.55	70	48.9	20
	S-TW036/025CR.75	94	48.9	40
	S-TW036/025CR.100	118	48.9	65
	S-TW036/025CR.125	142	48.9	90

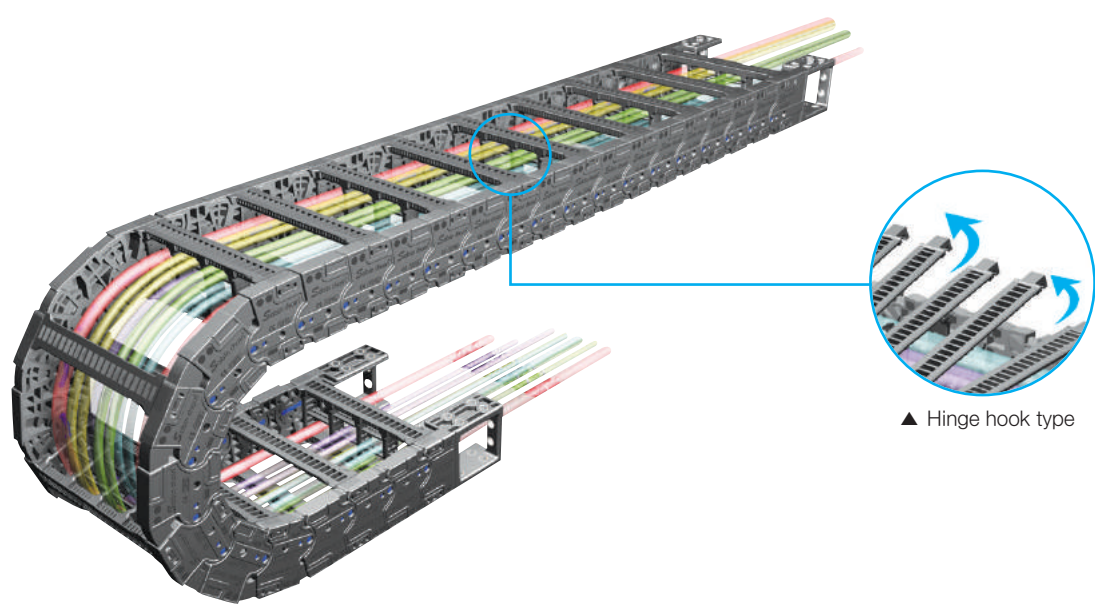


▲ Hinge hook type

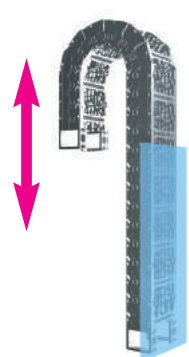

Vertical with curve above



Vertical with curve below




Horizontal application mounted on its side

» Calculation of the chain length

$$\left[L = \frac{L_s}{2} + L_p \right]$$


» Load diagrams self-supporting length

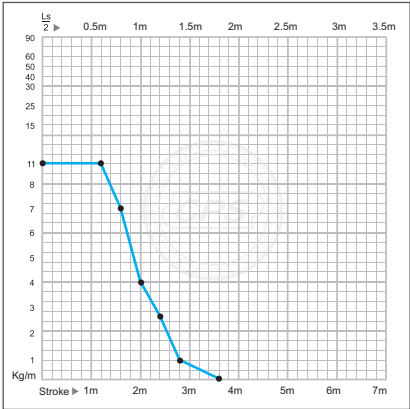

» Other installation length

Vertical curve above = max 2,0m
Vertical curve below = max 40m
Side Mounted, Unsupported = max 1,0m


» Layout of the chain

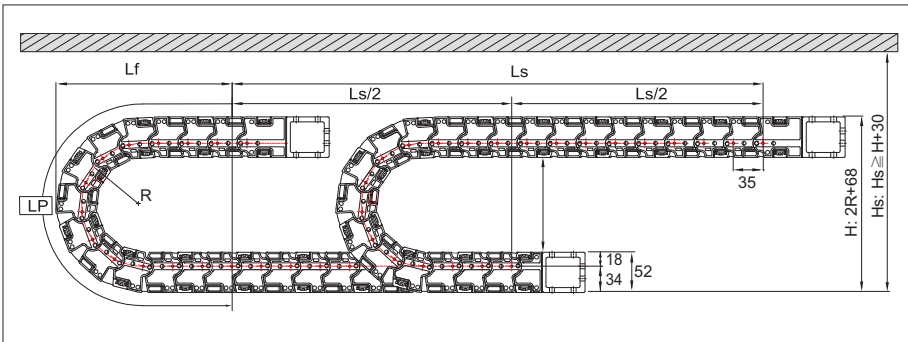

Bending Radius (R)	Lp Loop Length	Lf Loof Projection	H Moving Height
55	383	194	178
65	414	204	198
90	493	229	248
115	572	254	298
140	650	279	348
190	807	329	448

(Dimensions in mm)


>> Chain cross section

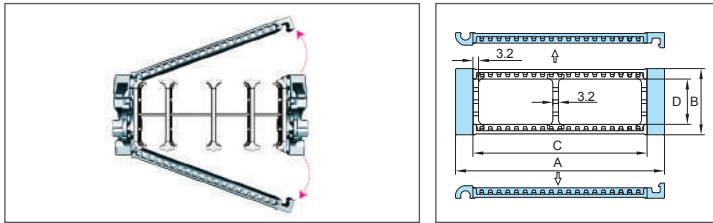

Chain Type	A Width (Outer)	B Height (Outer)	C Frame	D Height (Inner)	Weight kg/m
nsb 035N	55	52	35	40	1.10
	70		50		1.13
	75		55		1.15
	95		75		1.18
	120		100		1.25
	145		125		1.32
	170		150		1.41
	195		175		1.62
	220		200		1.72

(Dimensions in mm)


>> Free end bracket

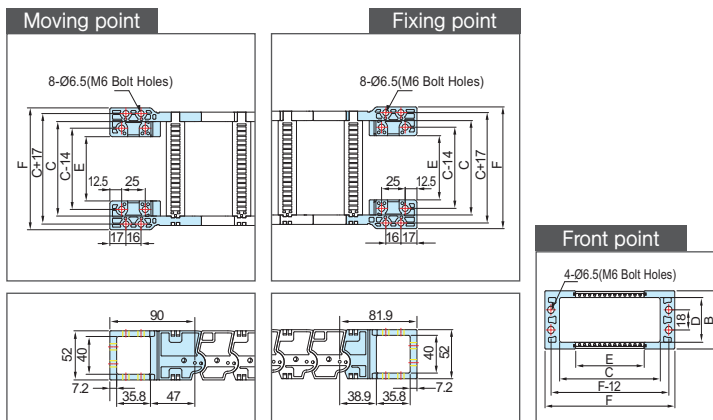


Chain Type	F Width(Outer)	B Height(Outer)	C Frame	D Height(Inner)	E M,EB Bolt hole width	Hole Type
nsb 035N	64	52	35	40	3	M6 Bolt Holes
	79		50		18	
	84		55		23	
	104		75		43	
	129		100		68	
	154		125		93	
	179		150		118	
	204		175		143	
	229		200		168	

(Dimensions in mm)

>> System tie wrap (STW)

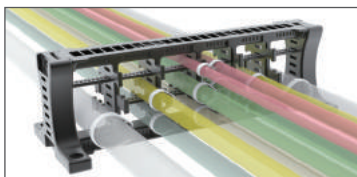


It is a unit to classify each cable for preventing entanglement of cables. It can either be installed to free end bracket or installed separately according its application environment.

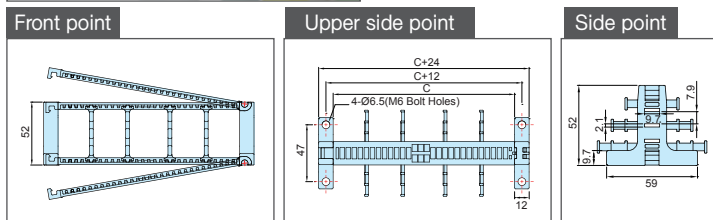


Chain Type	Ordering No.	C Frame	Hole Type
nsb 035N	S-TW,EB028,35	35	M6 Bolt Holes
	S-TW,EB028,50	50	
	S-TW,EB028,55	55	
	S-TW,EB028,75	75	
	S-TW,EB028,100	100	
	S-TW,EB028,125	125	
	S-TW,EB028,150	150	
	S-TW,EB028,175	175	
	S-TW,EB028,200	200	

(Dimensions in mm)


>> Dividers(DV)

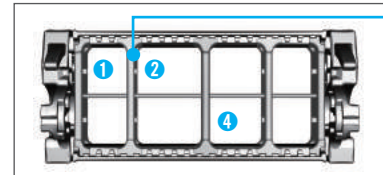

Assemble divider every second frame.
DV.T : Applied to Frame 125~200.
DV.M : Normal Divider.
DV.W : Applicable to System Tie Wrap or FEB.


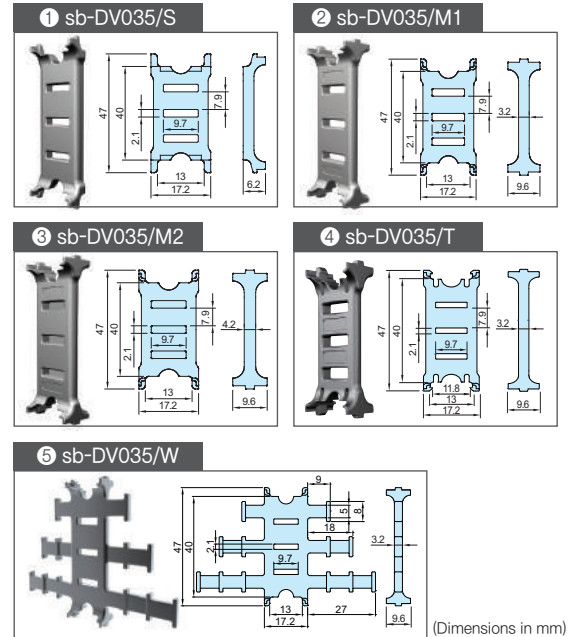


>> Separators(SP)


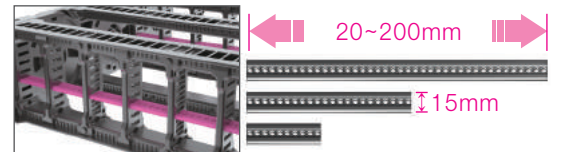


Chain Type	Ordering NO.	Frame
nsb 035N	S-SP/M,35	35
	S-SP/M,50	50
	S-SP/M,55	55
	S-SP/M,75	75
	S-SP/M,100	100
	S-SP/M,125	125
	S-SP/M,150	150
	S-SP/M,175	175
	S-SP/M,200	200


>> Tie wrap (TW)

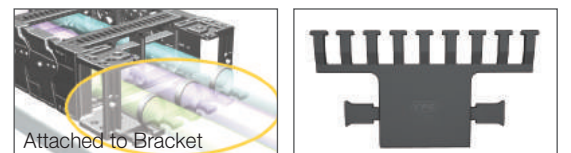


Chain Type	Ordering No.	A	B	C	D
nsb 035N	S-TW050/035N,50	82	64.5	12.00	5
	S-TW050/035N,55	82		12.00	10
	S-TW050/035N,75	107		12.13	30
	S-TW050/035N,100	132		15.25	55
	S-TW050/035N,125	157		14.70	80
	S-TW050/035N,150	182		14.35	105
	S-TW050/035N,175	203		12.31	130
	S-TW050/035N,200	232		13.88	155

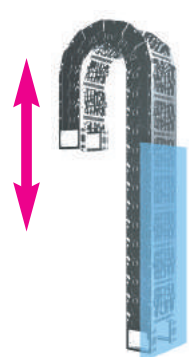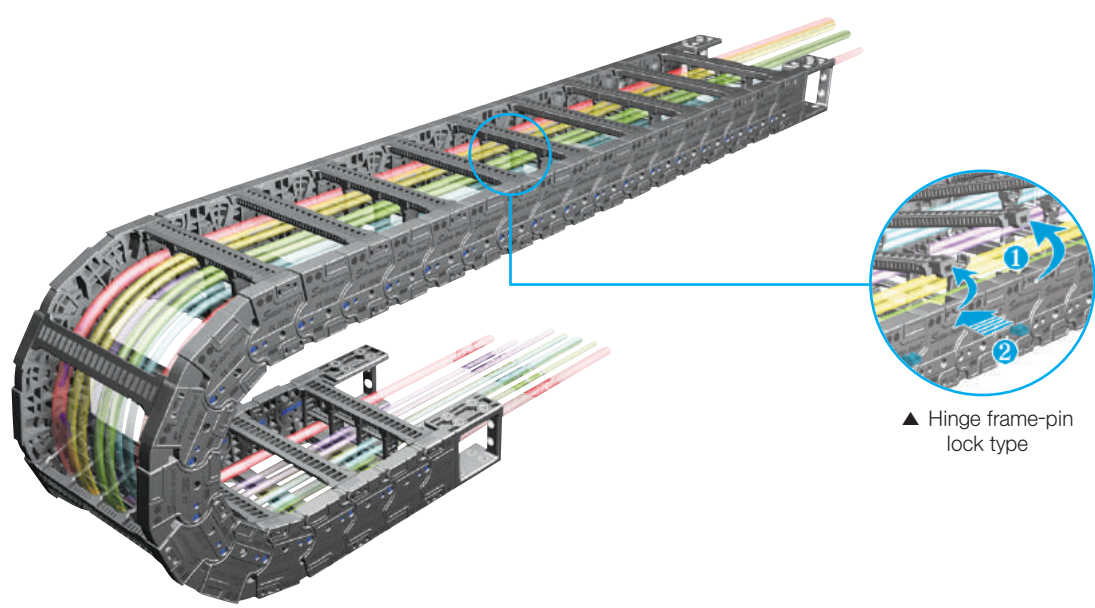

Vertical with curve above



Vertical with curve below



Horizontal application mounted on its side


» Calculation of the chain length

$$[L = \frac{L_s}{2} + L_p]$$


» Other installation length

Vertical curve above = max 6,0m
Vertical curve below = max 100m
Side Mounted, Unsupported = max 2,5m

» Load diagrams self-supporting length

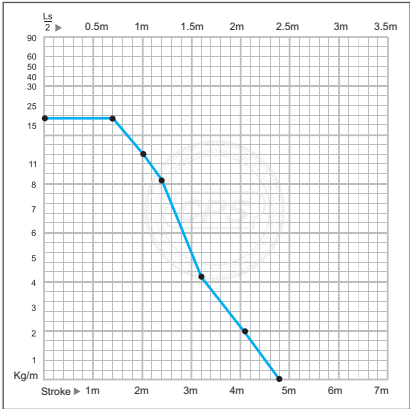



» Layout of the chain

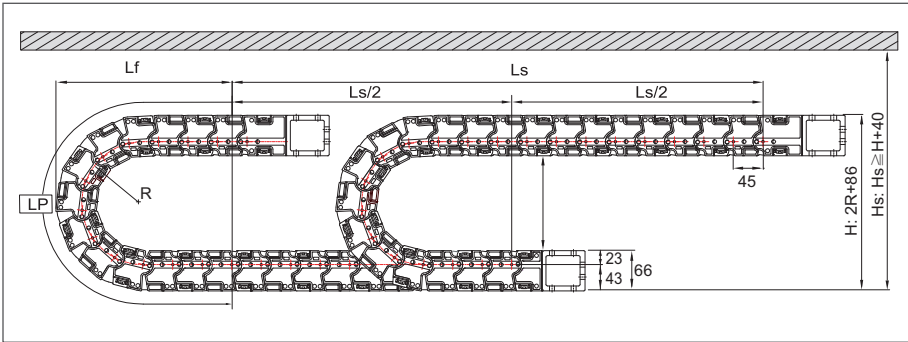

Bending Radius (R)	Lp Loop Length	Lf Loof Projection	H Moving Height
90	633	291	266
110	695	311	306
135	774	336	356
165	868	366	416
185	931	386	456
235	1,088	436	556
285	1,245	486	656

(Dimensions in mm)


>> Chain cross section

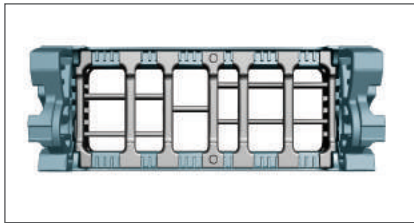

Chain Type	A Width (Outer)	B Height (Outer)	C Frame	D Height (Inner)	Weight kg/m
nsb 045N	80	66	50	45	2.06
	105		75		2.14
	130		100		2.22
	155		125		2.32
	170		140		2.38
	180		150		2.42
	195		165		2.47
	205		175		2.51
	220		190		2.72
	230		200		2.86
	270		240		3.09
	280		250		3.15
	330		300		3.43

(Dimensions in mm)


>> Free end bracket

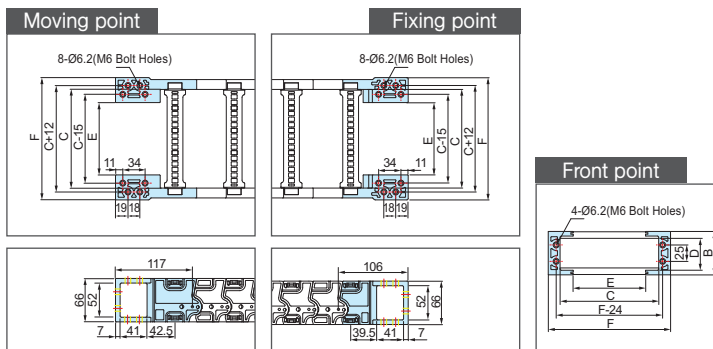


Chain Type	F Width(Outer)	B Height(Outer)	C Frame	D Height(Inner)	E M,EB Bolt hole width	Hole Type
nsb 045N	86	66	50	45	10	M6 Bolt Holes
	111		75		35	
	136		100		60	
	161		125		85	
	176		140		100	
	186		150		110	
	201		165		125	
	211		175		135	
	226		190		150	
	236		200		160	
	276		240		200	
	286		250		210	
	336		300		260	

(Dimensions in mm)

>> System tie wrap (STW)


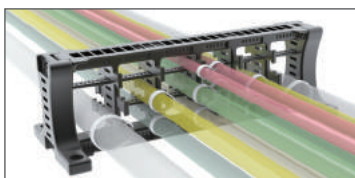


It is a unit to classify each cable for preventing entanglement of cables. It can either be installed to free end bracket or installed separately according its application environment.

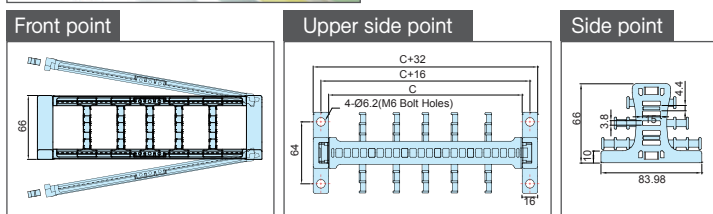


Chain Type	Ordering No.	C Frame	Hole Type
nsb 045N	S-TWEB045.50	50	M6 Bolt Holes
	S-TWEB045.75	75	
	S-TWEB045.100	100	
	S-TWEB045.125	125	
	S-TWEB045.140	140	
	S-TWEB045.150	150	
	S-TWEB045.165	165	
	S-TWEB045.175	175	
	S-TWEB045.190	190	
	S-TWEB045.200	200	
	S-TWEB045.240	240	
	S-TWEB045.250	250	
	S-TWEB045.300	300	


>> Dividers(DV)

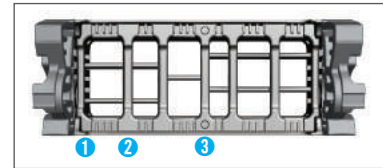

Assemble divider every second frame.
DV.T : Applied to Frame 200~300.
DV.M : Normal Divider.
DV.W : Applicable to System Tie Wrap or FEB.


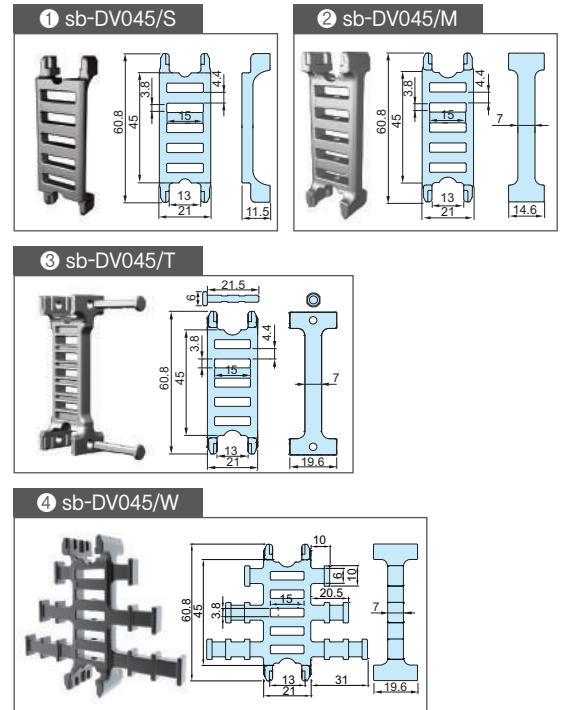


>> Separators(SP)

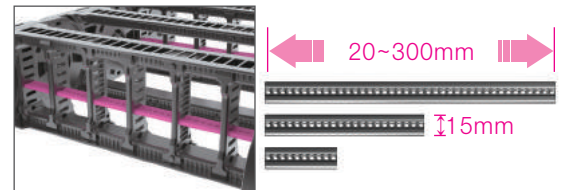


Chain Type	Ordering NO.
nsb 045N	sb-SP/400,400


>> Tie wrap (TW)

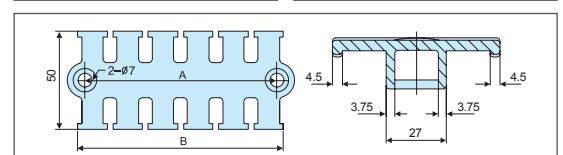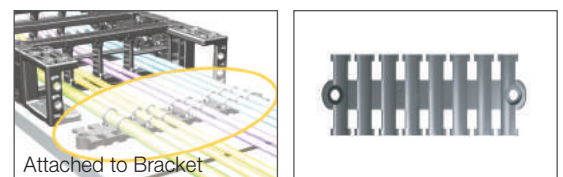


Chain Type	Ordering No.	A	B
nsb 045N	S-TW50	58	65
	S-TW75	75	82
	S-TW100	98	105
	S-TW125	122	129
	S-TW150	141	148

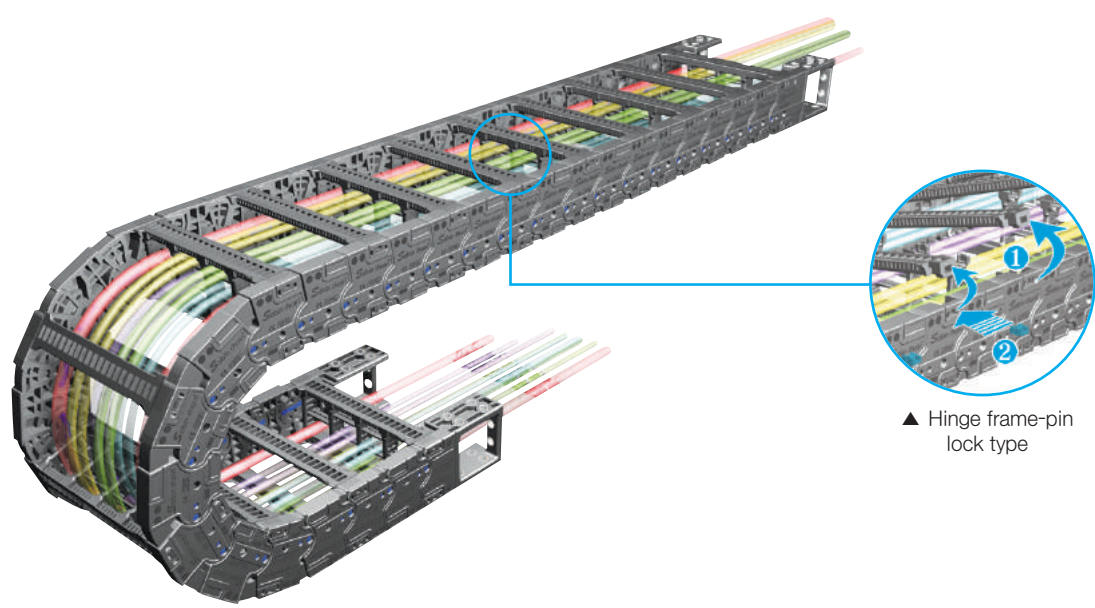


▲ Hinge frame-pin lock type

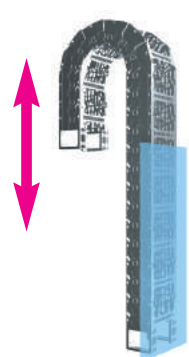

Vertical with curve above



Vertical with curve below



Horizontal application mounted on its side


» Calculation of the chain length

$$\left[L = \frac{L_s}{2} + L_p \right]$$


» Other installation length

Vertical curve above = max 6,0m
Vertical curve below = max 100m
Side Mounted, Unsupported = max 3,0m

» Load diagrams self-supporting length

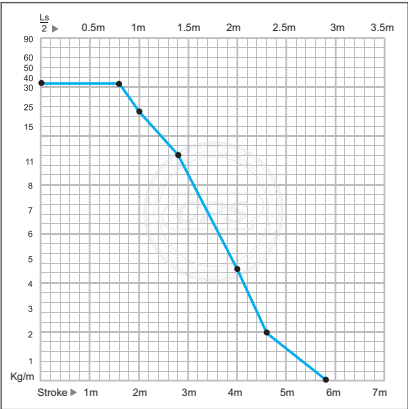



» Layout of the chain

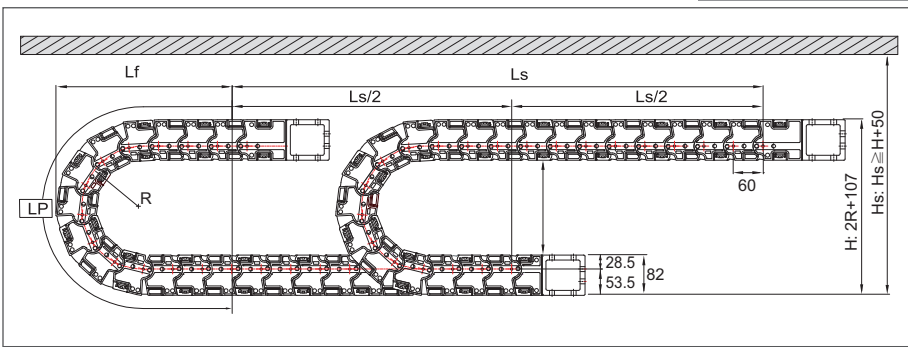

Bending Radius (R)	Lp Loop Length	Lf Loof Projection	H Moving Height
125	854	389	357
135	885	399	377
150	932	414	407
180	1,026	444	467
230	1,183	494	567
270	1,309	534	647
340	1,529	604	787

(Dimensions in mm)


» Chain cross section

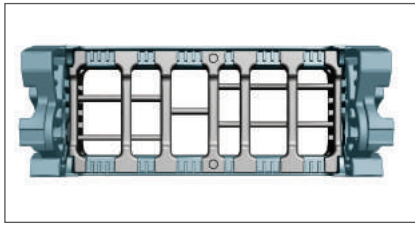

Chain Type	A Width (Outer)	B Height (Outer)	C Frame	D Height (Inner)	Weight kg/m
nsb 060N	115	82	75	55	3.30
	140		100		3.35
	165		125		3.51
	190		150		3.60
	215		175		3.69
	230		190		3.78
	240		200		3.84
	270		230		3.97
	280		240		4.01
	290		250		4.05
	340		300		4.26
	390		350		4.57
	440		400		4.86

(Dimensions in mm)


» Free end bracket

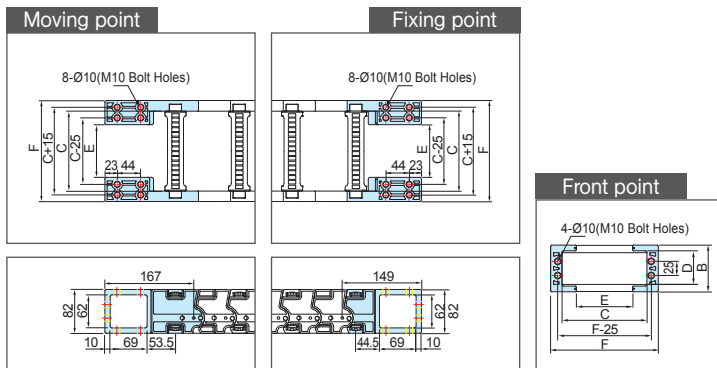


Chain Type	F Width(Outer)	B Height(Outer)	C Frame	D Height(Inner)	E MEB Bolt hole width	Hole Type
nsb 060N	115	82	75	55	24	M10 Bolt Holes
	140		100		49	
	165		125		74	
	190		150		99	
	215		175		124	
	230		190		139	
	240		200		149	
	270		230		179	
	280		240		189	
	290		250		199	
	340		300		249	
	390		350		299	
	440		400		349	

(Dimensions in mm)

» System tie wrap (STW)

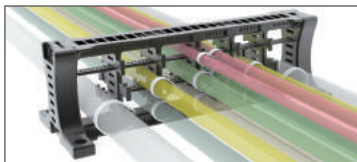


It is a unit to classify each cable for preventing entanglement of cables. It can either be installed to free end bracket or installed separately according its application environment.

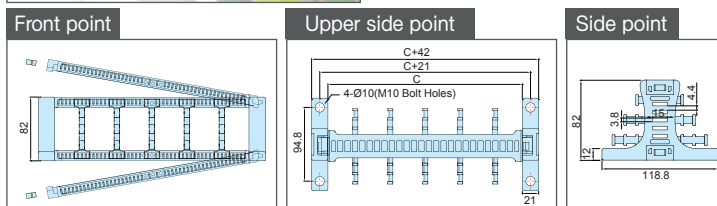


Chain Type	Ordering No.	C Frame	Hole Type
nsb 060N	S-TWEB060.75	75	M10 Bolt Holes
	S-TWEB060.100	100	
	S-TWEB060.125	125	
	S-TWEB060.150	150	
	S-TWEB060.175	175	
	S-TWEB060.190	190	
	S-TWEB060.200	200	
	S-TWEB060.230	230	
	S-TWEB060.240	240	
	S-TWEB060.250	250	
	S-TWEB060.300	300	
	S-TWEB060.350	350	
	S-TWEB060.400	400	

» Dividers(DV)

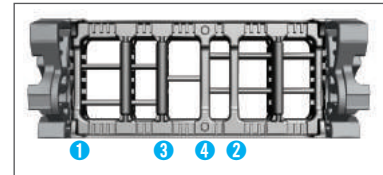


Assemble divider every second frame.
DV.T : Applied to Frame 250~400.
DV.M : Normal Divider.
DV.W : Applicable to System Tie Wrap or FEB.

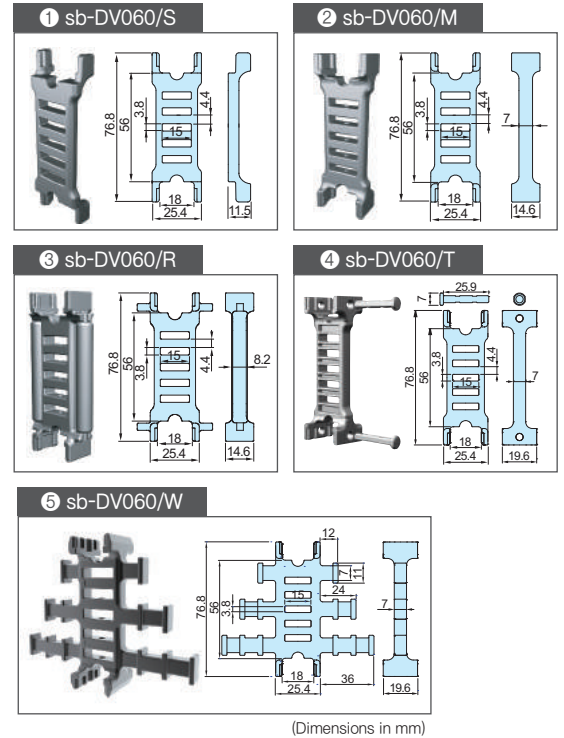



(Dimensions in mm)

» Separators(SP)

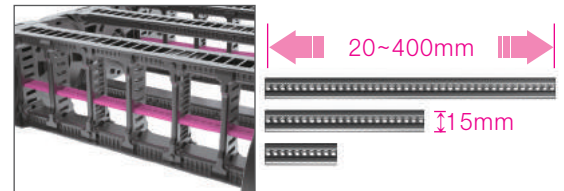


Chain Type	Ordering NO.
nsb 060N	sb-SP/400,400


» Tie wrap (TW)

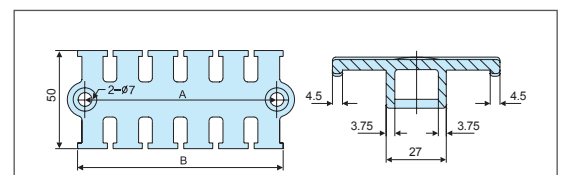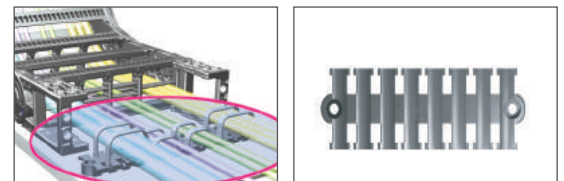


Chain Type	Ordering No.	A	B
nsb 060N	S-TW50	58	65
	S-TW75	75	82
	S-TW100	98	105
	S-TW125	122	129
	S-TW150	141	148

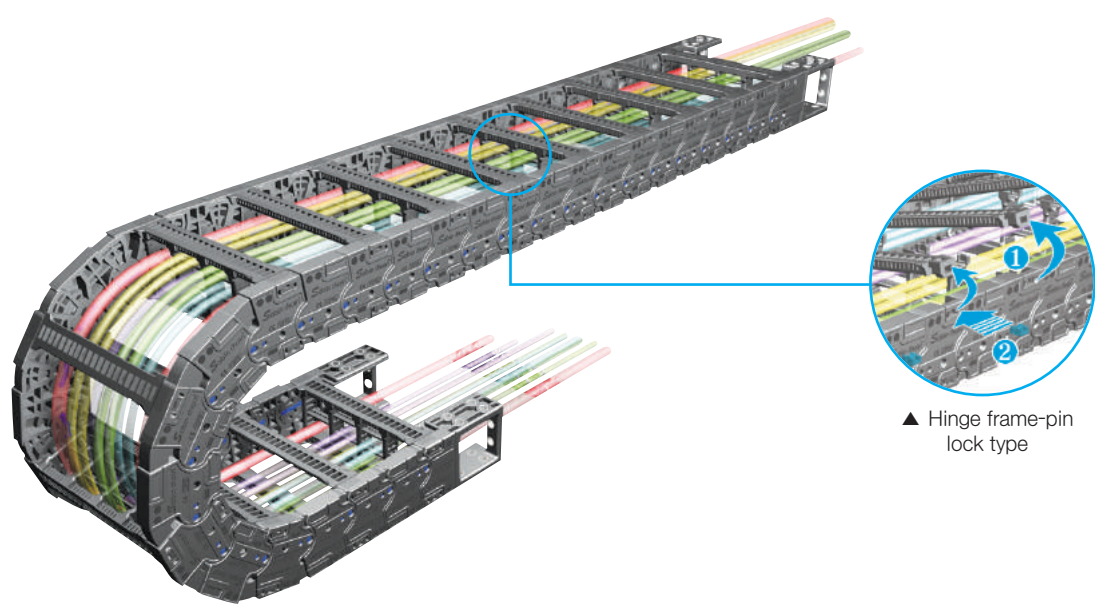


▲ Hinge frame-pin lock type

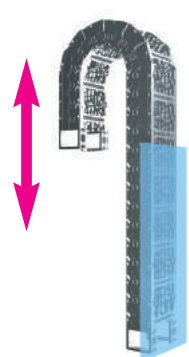

Vertical with curve above



Vertical with curve below



Horizontal application mounted on its side


» Calculation of the chain length

$$\left[L = \frac{L_s}{2} + L_p \right]$$


» Other installation length

Vertical curve above = max 6,0m
Vertical curve below = max 100m
Side Mounted, Unsupported = max 3,0m

» Load diagrams self-supporting length

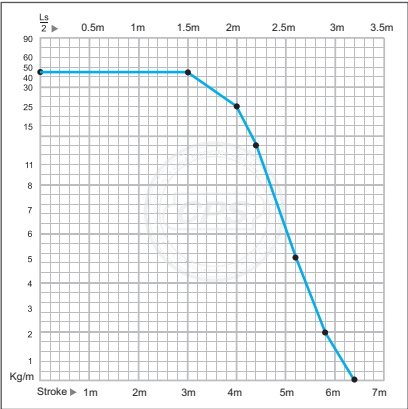



» Layout of the chain

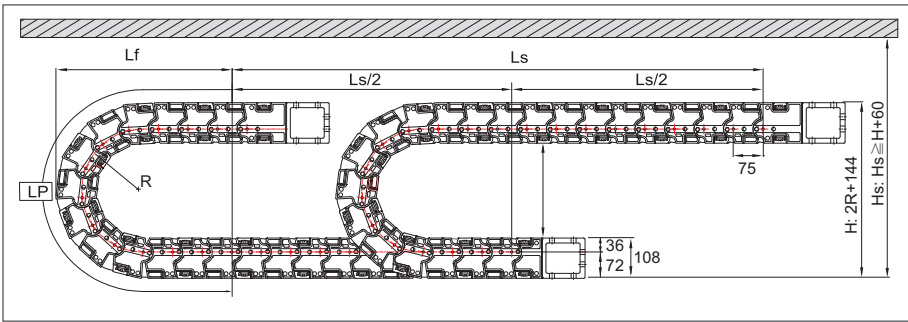

Bending Radius (R)	Lp Loop Length	Lf Loop Projection	H Moving Height
160	1,084	495	464
180	1,147	515	504
230	1,304	565	604
280	1,461	615	704
330	1,618	665	804
380	1,775	715	904
480	2,089	815	1,104

(Dimensions in mm)


>> Chain cross section

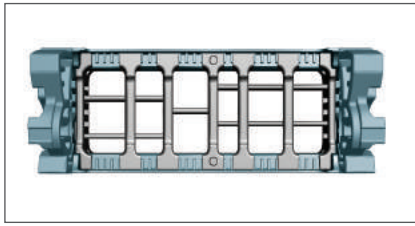

Chain Type	A Width (Outer)	B Height (Outer)	C Frame	D Height (Inner)	Weight kg/m
nsb 075N	115	108	75	78	4.80
	140		100		4.90
	155		115		4.97
	165		125		5.02
	190		150		5.12
	215		175		5.25
	240		200		5.46
	280		240		5.67
	290		250		5.72
	330		290		6.02
	340		300		6.09
	390		350		6.45
	440		400		6.83
	490		450		7.12
	540		500		7.32
	590		550		8.06
	640		600		8.20

(Dimensions in mm)


>> Free end bracket

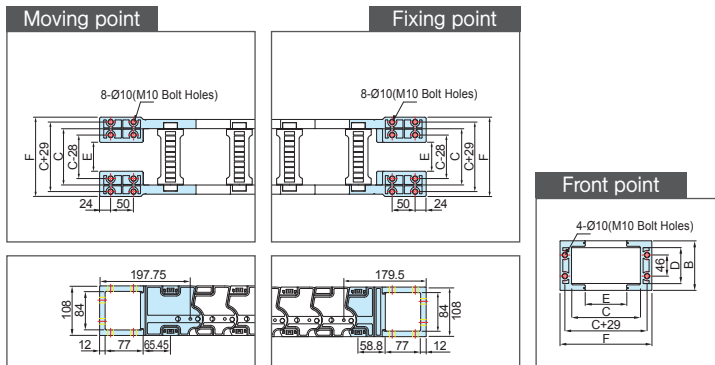


Chain Type	A Width(Outer)	B Height(Outer)	C Frame	D Height(Inner)	E M,EB Bolt hole width	Hole Type
nsb 075N	125	108	75	78	15	M10 Bolt Holes
	150		100		40	
	165		115		55	
	175		125		65	
	200		150		90	
	225		175		115	
	250		200		140	
	290		240		180	
	300		250		190	
	340		290		230	
	350		300		240	
	400		350		290	
	450		400		340	
	500		450		390	
	550		500		440	
	600		550		490	
	650		600		540	

(Dimensions in mm)


>> System tie wrap (STW)

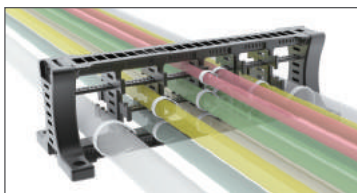

It is a unit to classify each cable for preventing entanglement of cables. It can either be installed to free end bracket or installed separately according its application environment.

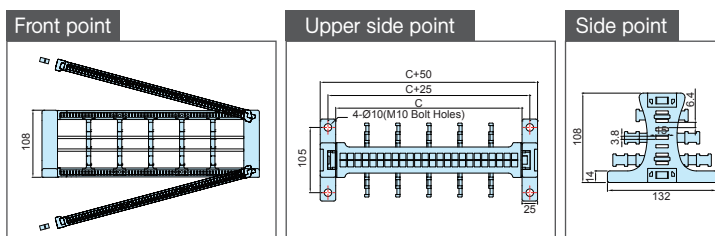

>> Dividers(DV)

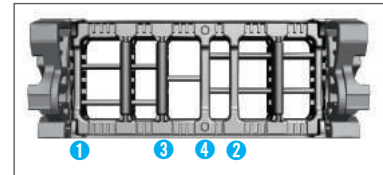


Assemble divider every second frame.

DV.T : Applied to Frame 300~600.

DV.M : Normal Divider.

DV.W : Applicable to System Tie Wrap or FEB.

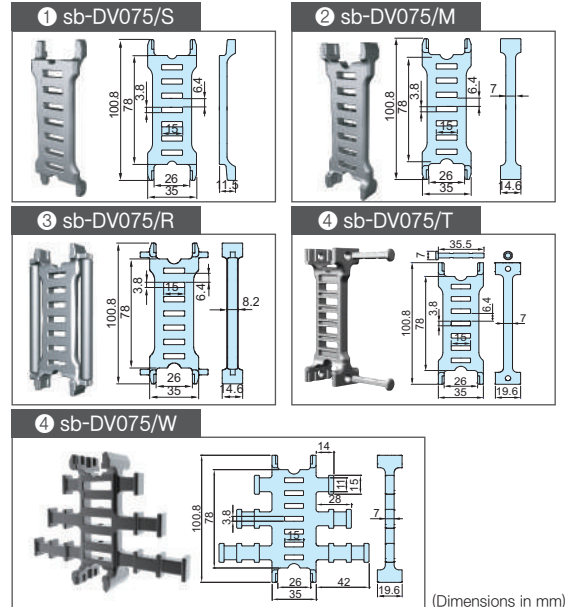



(Dimensions in mm)

>> Separators(SP)



Chain Type	Ordering NO.
nsb 075N	sb-SP/600,600

>> Tie wrap (TW)

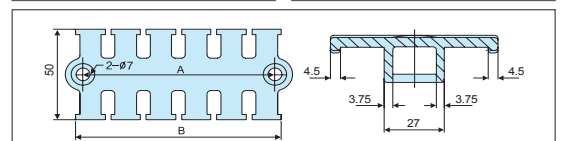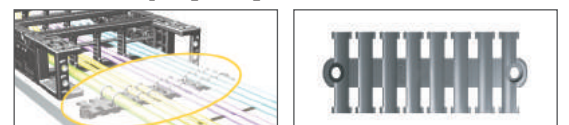

Chain Type	Ordering No.	A	B
nsb 075N	S-TW50	58	65
	S-TW75	75	82
	S-TW100	98	105
	S-TW125	122	129
	S-TW150	141	148

Chain Type	Ordering No.	C Frame	Hole Type
nsb 075N	S-TWEB075.75	75	M10 Bolt Holes
	S-TWEB075.100	100	
	S-TWEB075.115	115	
	S-TWEB075.125	125	
	S-TWEB075.150	150	
	S-TWEB075.175	175	
	S-TWEB075.200	200	
	S-TWEB075.240	240	
	S-TWEB075.250	250	
	S-TWEB075.290	290	
	S-TWEB075.300	300	
	S-TWEB075.350	350	
	S-TWEB075.400	400	
	S-TWEB075.450	450	
	S-TWEB075.500	500	
	S-TWEB075.550	550	
	S-TWEB075.600	600	