

MDRIVE 34™ MOTOR+DRIVER

Plus
MOTION CONTROL
(with optional CANopen)

STANDARD FEATURES

- Highly Integrated Microstepping Driver, Intelligent Motion Controller and NEMA 34 High Torque 1.8° Brushless Step Motor
- Advanced 2nd Generation Current Control for Exceptional Performance and Smoothness
- Single Supply: +12 to +75 VDC
- Cost Effective
- Extremely Compact
- Available Options:
 - Long Life Linear Actuators**
 - Internal Optical Encoder for Closed Loop Control
 - Integrated Planetary Gearbox
 - Control Knob for Manual Positioning
 - Linear Slide
- Three Rotary Motor Lengths Available
- Auxiliary Logic Power Supply Input
- 20 Microstep Resolutions up to 51,200 Steps Per Rev Including: Degrees, Metric, Arc Minutes
- Open or Optional Closed Loop Control
- Programmable Motor Run and Hold Currents
- Four +5 to +24 VDC I/O Lines Accepting Sourcing or Sinking Outputs
- One 10 Bit Analog Input Selectable: 0 to +10 VDC, 0 to +5 VDC, 0-20 mA, 4-20 mA
- 0 to 5MHz Step Clock Rate Selectable in 0.59Hz Increments
- RS-422/485 or Optional CANopen Communications
- 62 Software Addresses for Multi-Drop Communications
- Simple 1 to 2 Character Instructions
- Interface Options:
 - 12.0" (30.5cm) Flying Leads

EXPANDED PLUS² FEATURES

- 8 I/O Lines, +24 VDC Tolerant Sourcing or Sinking, Inputs and Outputs
- Electronic Gearing
- High Speed Position Capture Input or Trip Output
- Pluggable Locking Wire Crimp Interface

DESCRIPTION

The **MDrive34Plus Motion Control** offers system designers a cost effective, full featured programmable motion controller integrated with a NEMA 34 high torque 1.8° brushless step motor and a +12 to +75 volt microstepping driver.

The unsurpassed smoothness and performance delivered by the MDrive34Plus Motion Control are achieved through IMS's advanced 2nd generation current control. By applying innovative techniques to control current flow through the motor, resonance is significantly dampened over the entire speed range and audible noise is reduced.

The MDrive34Plus accepts a broad input voltage range from +12 to +75 VDC, delivering enhanced performance and speed. Oversized input capacitors are used to minimize power line surges, reducing problems that can occur with long cable runs and multiple drive systems. An extended operating range of -40° to +75°C provides long life, trouble free service in demanding environments.

Standard features of all MDrive34Plus Motion Control include four +5 to +24 volt general purpose I/O lines, one 10 bit analog input, 0 to 5MHz step clock rate, 20 microstep resolutions up to 51,200 steps per revolution, and full featured easy-to-program instruction set.

Expanded features of MDrive34Plus² versions include up to eight +5 to +24 volt general purpose I/O lines and the capability of electronic gearing by following a rotary or linear axis at an electronically controlled ratio, or an output clock can be generated fixed to the internal step clock.

All MDrive34Plus Motion Control are available with optional closed loop control. This increases functionality by adding stall detection, position maintenance and find index mark.

The closed loop configuration is added via a 512 line (2048 edge) optical encoder with index mark, internal to the unit so there is no increase in length. Or, for an expanded choice of line counts and resolutions with MDrive34Plus² versions only, closed loop control is available with an interface to a remotely mounted user-supplied external encoder.

The MDrive communicates over RS-422/485 which allows for point-to-point or multiple unit configurations utilizing one communication port. Addressing and hardware support up to 62 uniquely addressed units communicating over a single line. Baud rate is selectable from 4.8 to 115.2kbps.

Optional communication protocols include CANopen. The CAN bus is 2.0B active (11 and/or 29 bit) and is capable of all standard frequencies from 10kHz to 1MHz. CANopen features include node guarding, heartbeat producer, SDOs and PDOs. Highlights include variable PDO mapping and extended node identifier.

Motor configurations include a single shaft rotary in three lengths, and linear actuators with long life Acme screw**.

Interface connections are accomplished for standard MDrivePlus versions using 12.0" (30.5cm) flying leads, and for expanded MDrive34Plus² versions using pluggable locking wire crimp connectors.

MDrivePlus connectivity has never been easier with options ranging from **all-inclusive QuickStart Kits** to **individual interfacing cables** and **mating connector kits** to build your own cables. See pg 5.

The MDrive34Plus is a compact, powerful and cost effective motion control solution that will reduce system cost, design and assembly time for a large range of brushless step motor applications.

**Consult Factory for Availability.

MDrive34^{Plus} MOTION CONTROL

STANDARD SPECIFICATIONS (Plus Versions)

INPUT VOLTAGE (+V)	Range		+12 to +75 VDC Power supply current requirements = 4A (maximum) per MDrive34Plus. Actual power supply current will depend on voltage and load.		
AUX. LOGIC INPUT VOLTAGE	Range		+12 to +24 VDC Maintains power to control and feedback circuits (only) when input voltage is removed.		
ANALOG INPUT	Resolution		10 Bit		
	Voltage Range		0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA		
GENERAL PURPOSE I/O	Number/Type		4 Sinking Outputs/4 Sourcing or Sinking Inputs		
	Logic Range		Inputs and Outputs Tolerant to +24VDC, Inputs TTL Level Compatible		
	Output Sink Current		Up to 600 mA per Channel		
	Protection		Over Temp, Short Circuit, Transient Over Voltage, Over Voltage, Inductive Clamp		
COMMUNICATION	Type (Standard)		RS-422/485		
	Baud Rate		4.8 to 115.2kbps		
	Type (Optional)		CANopen DSP-402 (V2.0), DS-301 (V3.0), 2.OB Active		
	ID		11 and/or 29 Bit		
	Isolation		Galvanic		
	Features		Node Guarding, Heartbeat, SDOs, PDOs (Variable Mapping)		
MOTION	Open Loop Configuration		Number of Settings		20
			Steps Per Revolution		200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)
	Closed Loop Configuration (Optional)	Internal Encoder	Type		Internal, Optical
			Steps Per Revolution		51200
			Resolution		512 Lines/2048 Edges Per Rev
	Counters		Type		Position, Encoder/32 Bit
	Velocity		Edge Rate (Max)		5 MHz
			Range		+/- 5,000,000 Steps Per Second
			Resolution		0.5961 Steps Per Second
	Accel/Decel		Range		1.5 x 10 ⁹ Steps Per Second ²
			Resolution		90.9 Steps Per Second ²
SOFTWARE	Program Storage		Type/Size		Flash/6384 Bytes
	User Registers		(4) 32 Bit		
	User Program Labels and Variables		192		
	Math Functions		+, -, x, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT		
	Branch Functions		Branch & Call		
	General Purpose I/O Functions	Inputs		Home, Limit Plus, Limit Minus, Go, Stop, Pause, Jog Plus, Jog Minus, General Purpose	
		Outputs		Moving, Fault, Stall, Velocity Change, General Purpose	
	Trip Functions		Trip on Input, Trip on Position, Trip on Time, Trip Capture, Trip on Relative Position		
	Party Mode Addresses		62		
	Encoder Functions		Stall Detection, Position Maintenance, Find Index		
THERMAL	Operating Temperature		Heat Sink		-40° to +75°C (non-condensing)
			Motor		-40° to +90°C (non-condensing)

EXPANDED SPECIFICATIONS (Plus² Versions)


GENERAL PURPOSE I/O	Number/Type		8 Sourcing or Sinking Outputs/Inputs		
	Logic Range		Sourcing Outputs +12 to +24 VDC, Inputs and Sinking Outputs Tolerant to +24 VDC, Inputs TTL Level Compatible		
	Output Sink/Source Current		Up to 600 mA per Channel		
MOTION	Electronic Gearing		Range [‡] /Resolution/Threshold (External Clock In)		0.001 to 2.000/32 Bit/TTL
			Input Filter Range		50 nS to 12.9 μS (10 MHz to 38.8 kHz)
			Range [‡] (Secondary Clock Out)		1 to 1
	High Speed I/O		Position Capture	Input Filter Range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)
				Resolution	32 Bit
			Trip Output – Speed/Resolution/Threshold		150 nS/32 Bit/TTL
	Closed Loop Configuration (Optional)	Remote Encoder	Type		User-Supplied Differential Encoder
			Steps Per Revolution		See "Standard Specs Open Loop Steps/Rev" Above
			Resolution		User-Defined Note: μstep/rev 2X the encoder count/rev minimum

[‡] Adjusting the microstep resolution can increase the range.

MOTOR SPECIFICATIONS

	Holding Torque	Detent Torque	Rotor Inertia	Weight (Motor+Driver)
SINGLE LENGTH	381 oz-in / 269 N-cm	10.9 oz-in / 7.7 N-cm	0.01416 oz-in-sec ² / 1.0 kg-cm ²	4.1 lb / 1.9 kg
DOUBLE LENGTH	575 oz-in / 406 N-cm	14.16 oz-in / 10.0 N-cm	0.02266 oz-in-sec ² / 1.6 kg-cm ²	5.5 lb / 2.5 kg
TRIPLE LENGTH	1061 oz-in / 749 N-cm	19.83 oz-in / 14.0 N-cm	0.04815 oz-in-sec ² / 3.4 kg-cm ²	8.8 lb / 4.0 kg

MOTOR PERFORMANCE — Speed-Torque

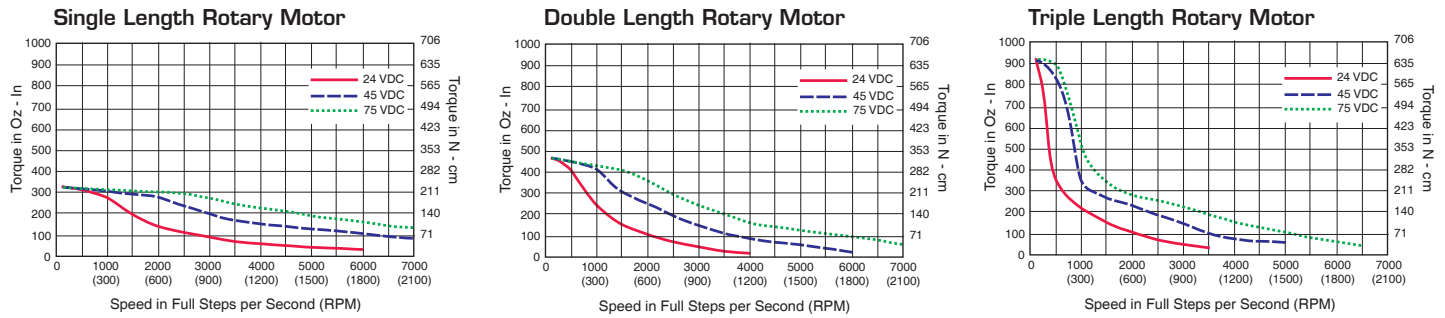

WIRE/PIN ASSIGNMENTS — MDrive34Plus Motion Control

Plus

P1: I/O & POWER CONNECTOR		
Flying Leads Wire Colors	Function	
White/Yellow	I/O 1	
White/Orange	I/O 2	
White/Violet	I/O 3	
White/Blue	I/O 4	
Green	Analog Input	
Black	Power/Aux Ground	
Red	+V (+12 to +75 VDC)	

P2: COMM CONNECTOR		
RS-422/485		
10-Pin IDC	Wire Crimp	Function
Pin 1	Pin 9	TX +
Pin 2	Pin 10	TX -
Pin 3	Pin 7	RX +
Pin 4	Pin 8	RX -
Pin 5	Pin 5	Aux-Logic (+12 to +24 VDC)
Pin 6	Pin 6	RX +
Pin 7	Pin 3	RX -
Pin 8	Pin 4	TX -
Pin 9	Pin 1	TX +
Pin 10	Pin 2	Comm Ground

Plus2

P1: I/O CONNECTOR		
Wire Crimp	Function	
	Expanded I/O	Remote Encoder Closed Loop Control
Pin 1	I/O Power	I/O Power
Pin 2	I/O Ground	I/O Ground
Pin 3	I/O 1	I/O 1
Pin 4	I/O 2	I/O 2
Pin 5	I/O 3	I/O 3
Pin 6	I/O 4	I/O 4
Pin 7	I/O 9	I/O 9
Pin 8	I/O 10	I/O 10
Pin 9	I/O 11	I/O 11
Pin 10	I/O 12	I/O 12
Pin 11	Capture/Trip I/O	Capture/Trip I/O
Pin 12	Analog In	Analog In
Pin 13	Step/Clock I/O	Step/Clock I/O
Pin 14	Direction/Clock I/O	Direction/Clock I/O
Pin 15	not applicable	Channel A +
Pin 16		Channel A -
Pin 17		Channel B +
Pin 18		Channel B -
Pin 19		Index +
Pin 20		Index -


P2: COMM CONNECTOR			
RS-422/485		CANopen	
Wire Crimp	Function	DB9 (Male)	Function
Pin 1	TX +	Pin 1	No Connect
Pin 2	Comm Ground	Pin 2	CAN Low
Pin 3	RX -	Pin 3	CAN -V
Pin 4	TX -	Pin 4	Aux Power
Pin 5	Aux-Logic (+12 to +24 VDC)	Pin 5	Shield
Pin 6	RX +	Pin 6	CAN -V
Pin 7	RX +	Pin 7	CAN High
Pin 8	RX -	Pin 8	No Connect
Pin 9	TX +	Pin 9	CAN +V
Pin 10	TX -		

P3: POWER CONNECTOR	
Wire Crimp	Function
Pin 1	+V (+12 to +75 VDC)
Pin 2	Power/Aux Ground

MECHANICAL SPECIFICATIONS

Dimensions in Inches (mm)

MDrive34Plus Motion Control

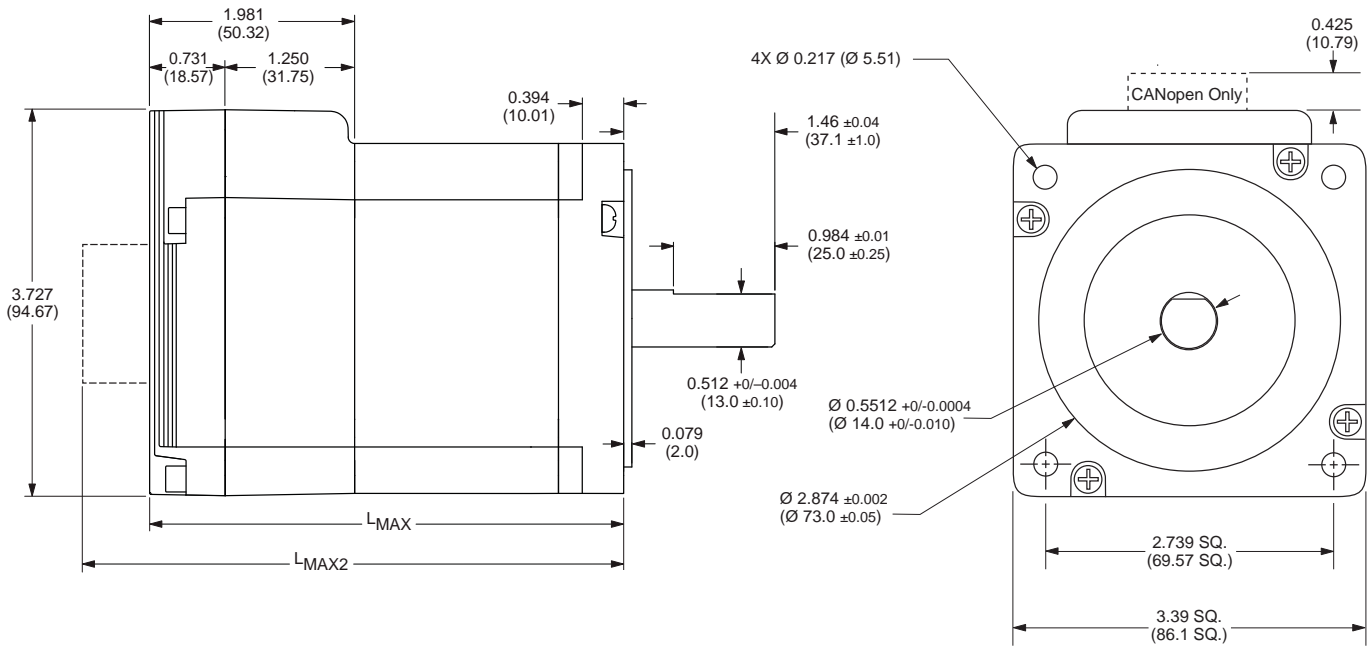


MDrive Lengths Inches (mm)

	L _{MAX} SINGLE SHAFT, INTERNAL ENCODER or LINEAR ACTUATOR VERSION	L _{MAX2} CONTROL KNOB VERSION
Motor Length		
Single	3.81 (96.77)	4.52 (114.81)
Double	4.60 (116.84)	5.31 (134.87)
Triple	6.17 (156.72)	6.88 (174.75)


L_{MAX2} Option



Connector Options

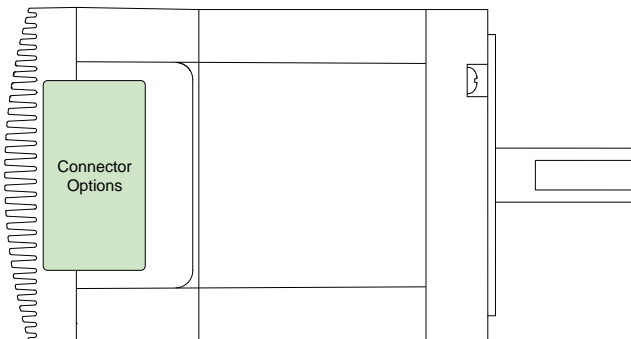


Plus




Flying Leads

Plus²




Pluggable Locking Wire Crimp

Plus² with Remote Encoder



Pluggable Locking Wire Crimp with Remote Encoder

Plus² with CANopen



Pluggable Locking Wire Crimp with CANopen DB9 (Male)

Connectivity details:
www.imshome.com/cables_cordsets.html

CONNECTIVITY

new QuickStart Kit

For rapid design verification, all-inclusive QuickStart Kits have communication converter, prototype development cable(s), instructions and CD for MDrivePlus initial functional setup and system testing.

new Communication Converters

Electrically isolated, in-line converters pre-wired with mating connectors to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port. Length 12.0' (3.6m).

Mates to connector:

10-Pin IDC	MD-CC400-001
10-Pin Wire Crimp	MD-CC402-001
DB9 CANopen	MD-CC500-001 *

*Requires mating connector adapter and power supply, not supplied.

Prototype Development Cables

Speed test/development with pre-wired mating connectors that have flying leads other end. Length 10.0' (3.0m).

Mates to connector:

10-Pin Wire Crimp	PD10-1434-FL3
14-Pin Wire Crimp	PD14-2334-FL3
20-Pin Wire Crimp	PD20-3400-FL3
2-Pin Wire Crimp	PD02-3400-FL3

new Mating Connector Kits

Use to build your own cables. Kits contain 5 mating shells with pins. Cable not supplied. Manufacturer's crimp tool recommended.

Mates to connector:

10-Pin Wire Crimp	CK-02
14-Pin Wire Crimp	CK-09
20-Pin Wire Crimp	CK-11
2-Pin Wire Crimp	CK-05

Kit contains 5 mating connectors that press fit onto ribbon cable. Cable not supplied.

10-Pin IDC	CK-01
------------------	-------

OPTIONS

Linear Actuator**

The MDrive34Plus is offered with numerous linear actuator styles and options to satisfy a broad range of linear motion applications. Contact the factory for details or see: www.imshome.com/mdriveplus_linear_actuator.html

Internal Encoder

All MDrive34Plus Motion Control versions are available with an optional internal 512-line (2048 count) optical encoder with index mark.

Remote Encoder (Plus² versions only)

MDrive34Plus² Motion Control versions are available with differential encoder inputs for use with a remote encoder (not supplied).

Control Knob

The MDrive34Plus Motion Control is available with a factory-mounted rear control knob for manual shaft positioning.

Planetary Gearbox

Efficient, low maintenance planetary gearboxes are offered assembled with the MDrive34Plus. Refer to details and part numbers on the back cover.

Linear Slide

Integrated linear slides are available factory installed for precision linear movement. Screw leads are 0.1", 0.2", 0.5" or 1.0" of travel per rev. Slides are 12.0" (30.5cm) to 42.0" (106.7cm) long. Contact factory for custom lengths. Refer to separate datasheet or web site for complete details.

** Consult Factory for Availability.

Connectivity details: www.imshome.com/cables_cordsets.html

PART NUMBERING

Plus
flying leads interface

P1: I/O & Power
12" Flying Leads

P2: Communications
RD = RS-422/485 with 10-Pin IDC Connector
RL = RS-422/485 with 10-Pin Friction Lock Wire Crimp

K MDI1F
34
7
OPTION

Motor
A = Single Length & Linear Actuator**
B = Double Length
C = Triple Length

Example #1: Part Number **MDI1FRD34A7** is an MDrive34Plus Motion Control with 12" flying leads I/O & power interface, RS-422/485 communications with 10-pin IDC connector, and NEMA 34 single length motor.

Plus²
pluggable interface

P1: I/O
14-Pin Locking Wire Crimp
(20-Pin with Remote Encoder)

P3: Power
2-Pin Locking Wire Crimp

P2: Communications
RL = RS-422/485 with 10-Pin Friction Lock Wire Crimp
CB = CANopen with DB9 Connector

K MDI3C
34
7
OPTION

Motor
A = Single Length & Linear Actuator**
B = Double Length
C = Triple Length

Example #2: Part Number **MDI3CRL34A7** is an MDrive34Plus² Motion Control with 14-pin I/O interface, 2-pin power interface, RS-422/485 communications with 10-pin friction lock wire crimp connector, and NEMA 34 single length motor.

** Consult Factory for Availability.

OPTIONS

Linear Actuator** **-L**

For complete product specifications, see: www.imshome.com/mdriveplus_linear_actuator.html

Internal Encoder **-EQ**

Example: **MDI1FRD34A7-EQ** adds a 512-line internal optical encoder with index mark to example #1.

Remote Encoder **-EE**

Example: **MDI3CRL34A7-EE** adds differential encoder inputs for use with remote encoder (not supplied) to example #2, increasing the wire crimp connector from 14-pins to 20-pins. Available with Plus² versions only. May not be combined with internal encoder option.

Control Knob **-N**

Example: **MDI3CRL34A7-N** adds a rear control knob for manual positioning to example #2.

Planetary Gearbox **-G** **-F**

Refer to gearbox page for complete table of ratios and part numbers.
Optional NEMA Flange

Example: **MDI3CRL34A7-G1A2** adds a 1-stage planetary gearbox with 5.18:1 ratio to example #2. Add -F for optional NEMA flange.

Linear Slide **-R**

<p>Screw Lead (inches/rev)</p> <p>A = 0.10" (2.54mm) B = 0.20" (5.08mm) C = 0.50" (12.7mm) D = 1.00" (25.4mm)</p>	<p>Standard Screw Lengths 12", 18", 24", 36" or 42" For Custom Lengths, Consult Factory</p>
--	--

Example: **MDI3CRL34A7-RA12** adds a Linear Slide with 0.10" screw lead, 12" long to example #2.

MDrive34Plus Motion Control REV060208 5

MDrive34PLUS WITH PLANETARY GEARBOX

The MDrive34Plus is available with a Planetary Gearbox option developed to increase torque at lower speeds, enable better inertia matching and produce finer positional resolutions. These efficient, low maintenance Planetary Gearbox come fully assembled with the MDrive and are offered in a large number of reduction ratios in 1-, 2- and 3-stage configurations. An optional NEMA Output Flange allows mounting the Planetary Gearbox to the load using a standard NEMA bolt circle. Planetary Gearbox may be combined with other MDrive34Plus options, however are unavailable with Linear Actuators.

Planetary Gearbox Parameters


	Permitted Output Torque (oz-in/Nm)	Gearbox Efficiency	Maximum Backlash	Output Side with Ball Bearing			
				Maximum Load (lb-force/N)		Weight (oz/g)	
				Radial	Axial	Gearbox	with Flange
1-STAGE	2832/20.0	0.80	1.0°	90/400	18/80	64.4/1827	66.7/1890
2-STAGE	8496/60.0	0.75	1.5°	135/600	27/120	89.5/2538	92.6/2625
3-STAGE	16992/120.0	0.70	2.0°	225/1000	45/200	114.6/3248	118.5/3360

Ratios and Part Numbers

Planetary Gearbox	Ratio (Rounded)	Part Number**
1-Stage	3.71:1	G1A1
1-Stage	5.18:1	G1A2
1-Stage	6.75:1	G1A3
2-Stage	13.73:1	G1A4
2-Stage	15.88:1	G1A5
2-Stage	18.37:1	G1A6
2-Stage	19.20:1	G1A7
2-Stage	22.21:1	G1A8
2-Stage	25.01:1	G1A9
2-Stage	26.85:1	G1B1
2-Stage	28.93:1	G1B2
2-Stage	34.98:1	G1B3
2-Stage	45.56:1	G1B4
3-Stage	50.89:1	G1B5
3-Stage	58.86:1	G1B6
3-Stage	68.07:1	G1B7
3-Stage	71.16:1	G1B8
3-Stage	78.72:1	G1B9
3-Stage	92.70:1	G1C1
3-Stage	95.18:1	G1C2
3-Stage	99.51:1	G1C3
3-Stage	107.21:1	G1C4
3-Stage	115.08:1	G1C5
3-Stage	123.98:1	G1C6
3-Stage	129.62:1	G1C7
3-Stage	139.14:1	G1C8
3-Stage	149.90:1	G1C9
3-Stage	168.85:1	G1D1
3-Stage	181.25:1	G1D2
3-Stage	195.27:1	G1D3
3-Stage	236.10:1	G1D4
3-Stage	307.55:1	G1D5

Planetary Gearbox for MDrive34Plus

Dimensions in Inches (mm)

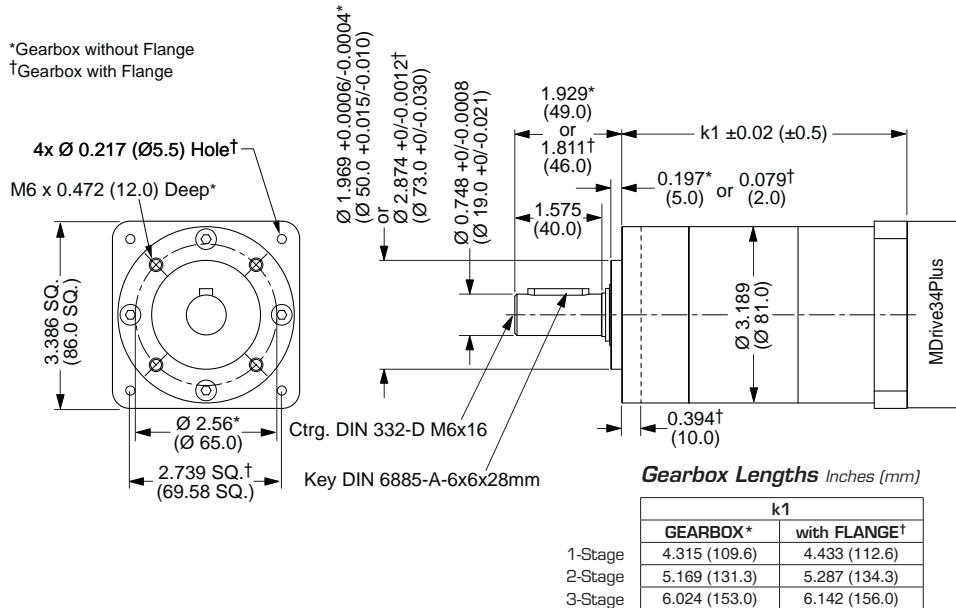

**Include optional planetary gearbox by adding -G plus 3 characters to the end of an MDrive part number.

U.S.A. SALES OFFICES

Eastern Region

Tel. 862 208-9742 - Fax 973 661-1275
e-mail: jroake@imshome.com

Central Region

Tel. 260 402-6016 - Fax 419 858-0375
e-mail: dwaksman@imshome.com

Western Region

Tel. 602 578-7201
e-mail: dweisenberger@imshome.com

IMS ASIA PACIFIC OFFICE

30 Raffles Pl., 23-00 Caltex House, Singapore 048622
Tel. +65/6233/6846 - Fax +65/6233/5044
e-mail: wllee@imshome.com

IMS EUROPEAN SALES MANAGEMENT

4 Quai Des Etoirits
69005 Lyon, France
Tel. +33/4 7256 5113 - Fax +33/4 7838 1537
e-mail: bmartinez@imshome.com

IMS UK Ltd.

Sanderson Centre, 15 Lees Lane
Gosport, Hampshire PO12 3UL
Tel. +44/0 2392-520775 - Fax +44/0 2392-502559
e-mail: mcheckley@imshome.com

TECHNICAL SUPPORT

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: etech@imshome.com

Intelligent Motion Systems, Inc.

370 North Main Street, P.O. Box 457
Marlborough, CT 06447 - U.S.A.
Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: info@imshome.com
http://www.imshome.com